



## Types 150 et 200

**Material:** PVC  
**Operating temperatures:** -20 to +90°C

**Application:** Designed to be mounted in our various PLIOGRAPH<sup>PLUS</sup> marker tubes, the marker rings are protected against friction, dust, dirt, fluids and chemicals. The marking can be changed at any time without disconnecting the cable.

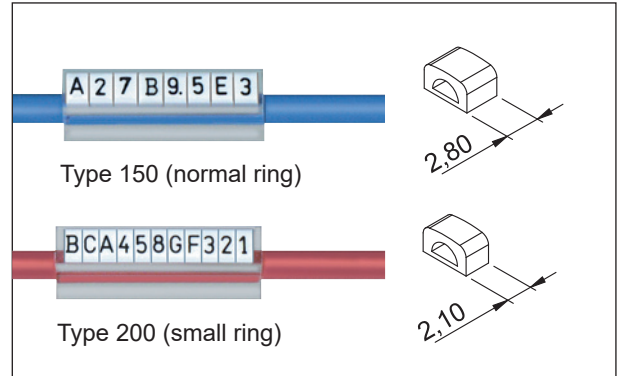

Marker booklet	Type 150	Type 200
Quantity of markers per booklet	150	200
Marker width	2,8 mm	2,1 mm
Marker height	3,8 mm	3,8 mm
Print height	2,1 mm	2,1 mm
Capacity of an marker tube length 25 mm	8	11

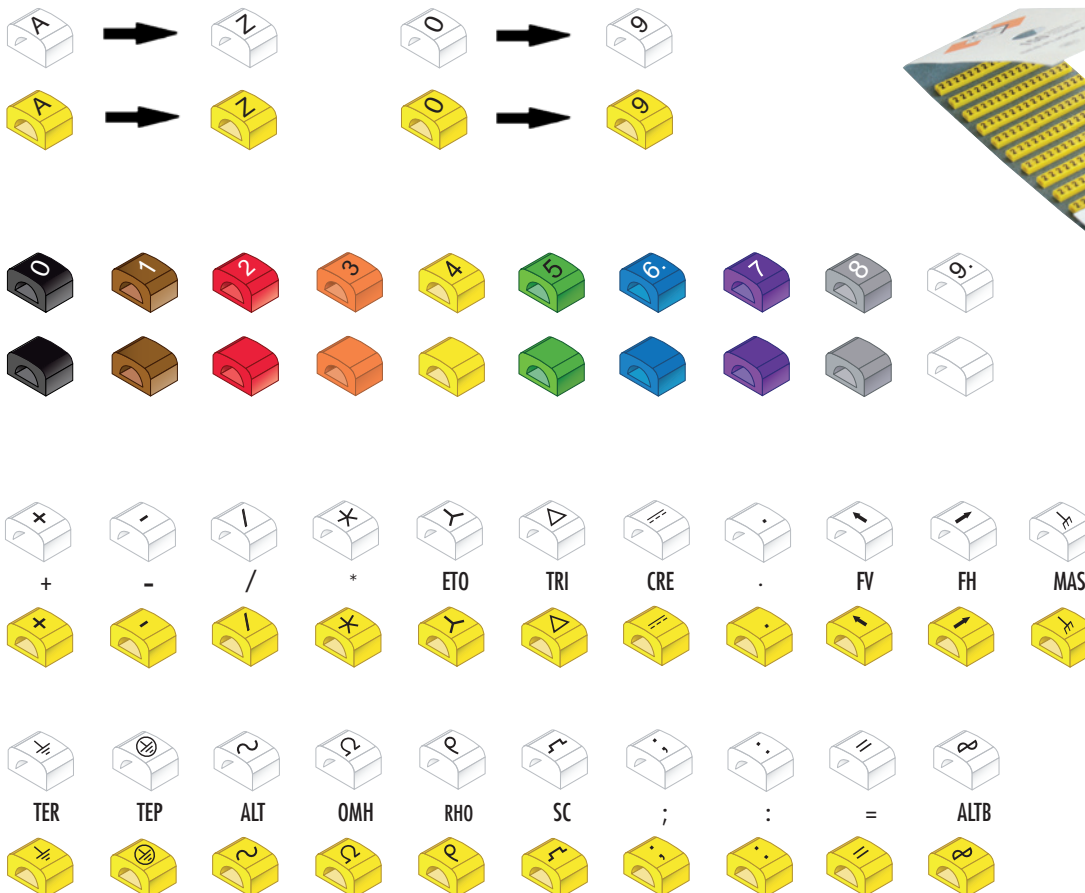



Example for order:

code group	detail article	code colour	code marker
0373	01XXXX	XXXX	XXXX

Type 150 **2** 0:3:7:3 0:0:6:1 0:0:7:2

Type 200 **E** 0:3:7:3 0:0:6:5 0:0:4:E

**code colour**

<b>010</b>	<b>006</b>	<b>007</b>	<b>005</b>	<b>004</b>	<b>003</b>	<b>002</b>	<b>008</b>	<b>013</b>	<b>001</b>	<b>015</b>
black	brown	red	orange	yellow	green	blue	purple	grey	white	pink

**code marker**



	Type 150	Type 200
A	A 0373 0060 ***A	0373 0065 ***A
B	B 0373 0060 ***B	0373 0065 ***B
C	C 0373 0060 ***C	0373 0065 ***C
D	D 0373 0060 ***D	0373 0065 ***D
E	E 0373 0060 ***E	0373 0065 ***E
F	F 0373 0060 ***F	0373 0065 ***F
G	G 0373 0060 ***G	0373 0065 ***G
H	H 0373 0060 ***H	0373 0065 ***H
I	I 0373 0060 ***I	0373 0065 ***I
J	J 0373 0060 ***J	0373 0065 ***J
K	K 0373 0060 ***K	0373 0065 ***K
L	L 0373 0060 ***L	0373 0065 ***L
M	M 0373 0060 ***M	0373 0065 ***M
N	N 0373 0060 ***N	0373 0065 ***N
O	O 0373 0060 ***O	0373 0065 ***O
P	P 0373 0060 ***P	0373 0065 ***P
Q	Q 0373 0060 ***Q	0373 0065 ***Q
R	R 0373 0060 ***R	0373 0065 ***R
S	S 0373 0060 ***S	0373 0065 ***S
T	T 0373 0060 ***T	0373 0065 ***T
U	U 0373 0060 ***U	0373 0065 ***U
V	V 0373 0060 ***V	0373 0065 ***V
W	W 0373 0060 ***W	0373 0065 ***W
X	X 0373 0060 ***X	0373 0065 ***X
Y	Y 0373 0060 ***Y	0373 0065 ***Y
Z	Z 0373 0060 ***Z	0373 0065 ***Z

	Type 150	Type 200
0	0 0373 0061 ***0	0373 0066 ***0
1	1 0373 0061 ***1	0373 0066 ***1
2	2 0373 0061 ***2	0373 0066 ***2
3	3 0373 0061 ***3	0373 0066 ***3
4	4 0373 0061 ***4	0373 0066 ***4
5	5 0373 0061 ***5	0373 0066 ***5
6	6 0373 0061 ***6	0373 0066 ***6
7	7 0373 0061 ***7	0373 0066 ***7
8	8 0373 0061 ***8	0373 0066 ***8
9	9 0373 0061 ***9	0373 0066 ***9

	Type 150	Type 200
0	0373 0061 0100	0373 0066 0100
1	0373 0061 0061	0373 0066 0061
2	0373 0061 0072	0373 0066 0072
3	0373 0061 0053	0373 0066 0053
4	0373 0061 0044	0373 0066 0044
5	0373 0061 0035	0373 0066 0035
6	0373 0061 0026	0373 0066 0026
7	0373 0061 0087	0373 0066 0087
8	0373 0061 0138	0373 0066 0138
9	0373 0061 0019	0373 0066 0019

	Type 150	Type 200
+	0373 0063 *** +	0373 0068 *** +
-	0373 0063 *** -	0373 0068 *** -
/	0373 0063 *** /	0373 0068 *** /
*	0373 0063 *** *	0373 0068 *** *
△	0373 0063 *** ETO	0373 0068 *** ETO
△	0373 0063 *** TRI	0373 0068 *** TRI
≡	0373 0063 *** CRE	0373 0068 *** CRE
.	0373 0063 *** .	0373 0068 *** .
↑	0373 0063 *** FV	0373 0068 *** FV
→	0373 0063 *** FH	0373 0068 *** FH
m	0373 0063 *** MAS	0373 0068 *** MAS
⊥	0373 0063 *** TER	0373 0068 *** TER
⊕	0373 0063 *** TEP	0373 0068 *** TEP
~	0373 0063 *** ALT	0373 0068 *** ALT
⊗	0373 0063 *** ALTB	0373 0068 *** ALTB
Ω	0373 0063 *** OHM	0373 0068 *** OHM
ρ	0373 0063 *** RHO	0373 0068 *** RHO
∫	0373 0063 *** SC	0373 0068 *** SC
:	0373 0063 *** ,	0373 0068 *** ,
:	0373 0063 *** .	0373 0068 *** .
=	0373 0063 *** =	0373 0068 *** =

	Type 150	Type 200
	0373 0062 010	0373 0067 010
	0373 0062 006	0373 0067 006
	0373 0062 007	0373 0067 007
	0373 0062 005	0373 0067 005
	0373 0062 004	0373 0067 004
	0373 0062 003	0373 0067 003
	0373 0062 002	0373 0067 002
	0373 0062 008	0373 0067 008
	0373 0062 013	0373 0067 013
	0373 0062 001	0373 0067 001
	0373 0062 015	0373 0067 015

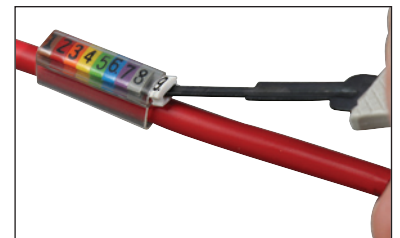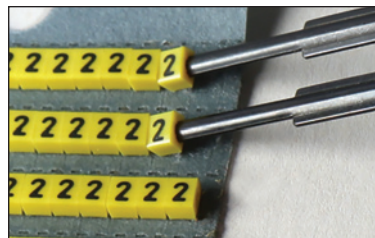

# Labels for carriers

LASER printed





PLIOGRAPH<sup>PLUS</sup>



## LMB



- Material:** PET
- Standard colours:** 1 side white - 1 side yellow
- Operating temperatures:** -40 to +125°C
- Label thickness:** 0,195 mm
- Specification:** halogene free
- Application:**
  - printed on a LASER printer
  - double sided printing: 1 side colour white and 1 side colour yellow

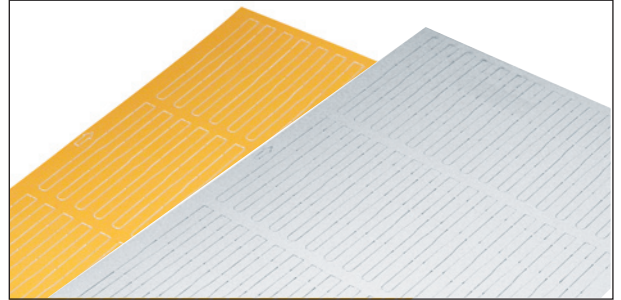

Type	artide number	dimensions label (mm)	no. labels / card	size of the card	pcs
LMB 30/4,6	0373 0100 000	30 x 4,6	48	A5	10



Label LMB allows a personalised marking of your cables on a LASER printer. It slips easily into all our carriers PLIOGRAPH<sup>PLUS</sup> thanks to its adapted form, and is maintained inside after installation and cut of the strip.

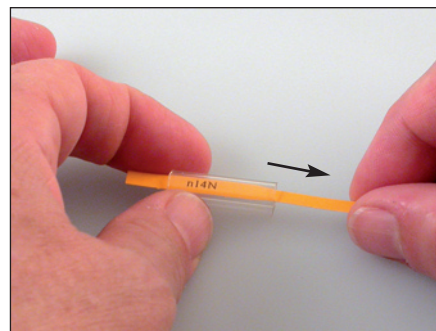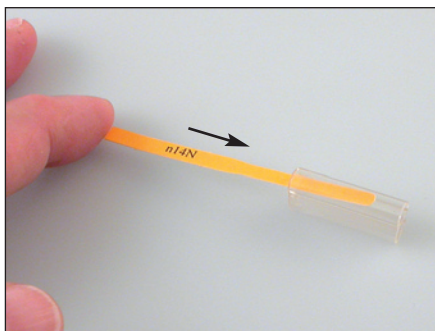

You can download the printing software PLIOMARK-PRINT for these labels on our web site: [www.ses-sterling.com](http://www.ses-sterling.com), choose **Products**, then **Software and Media**.

Free version for printing text only or full version (30-day trial) for printing text, image, logo, barcode and QR-code (full licence: item code 0317 0003 000).



B5/3



B13/22: Licence Software PLIOMARK-PRINT V10.0



# Label and profil for carriers PLIOGRAPH<sup>PLUS</sup>



PLIOGRAPH<sup>PLUS</sup>




## 14-1177


**Material:** PC/ASA  
**Colour:** white  
**Operating temperatures:** -20 to +60°C  
**Specification:** halogene free



**Application:** The 14-1177 labels are mounted in the 18 mm long PLIOGRAPH-PLUS marker tubes (pages B5/3)  
 They can be marked with our indelible marker pens QUICK-MARKERS (page B1/7-01) or LASER engraved on request.

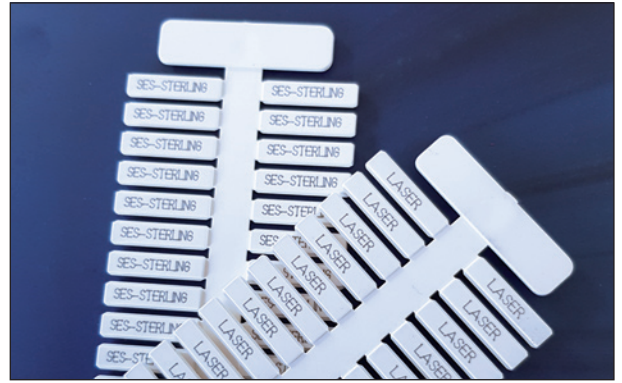

type	article number	designation	pcs
14-1177	0378 0010 000	Label with 48 markers to print	20

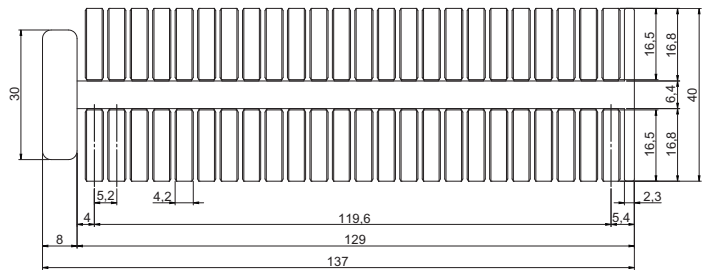

LASER engraving in our workshops on request

## M1P-M45

**Material:** PVC  
**Operating temperatures:** -20 to +90°C

**Application:** This M1P-M45 profile, printable with our PLIOSCRIB printers, is mounted in the PLIOGRAPH<sup>PLUS</sup> marker tubes and allows the identification of cables Ø 1.1 to 30 mm.




code colours	001	002	003	004	005	007
	white	blue	green	yellow	orange	red

Example for order:

code group	detail article	code colour
0378	0507	x x x

type	article number	m
M1P-M45	0378 0507 xxx	25



B5/3



B1/7-01



B13/21

