

WEBRelay™ 10

Quick Start Guide




Basic Setup Steps:

- (1) Connect unit to power and network only.
- (2) Set up a computer on the same network to configure WebRelay-10™. To do this, set the IP address of the computer to 192.168.1.50 with a netmask of 255.255.255.0.
- (3) Configure WebRelay-10™ using web browser. Do this by pointing browser to <http://192.168.1.2/setup.html>. Password is webrelay (all lower case).
- (4) Set the permanent IP address in the configuration page. Restart WebRelay-10™ (remove power, re-apply power). After restarting the unit, set your computer back to it's original settings and access WebRelay-10™ at its new IP address.
- (5) Connect relay contacts.

Factory Default Settings

IP Address: 192.168.1.2
 Subnet Mask: 255.255.255.0
 Control Web Address: <http://192.168.1.2>
 Setup Web Address: <http://192.168.1.2/setup.html>
 Username: *no username required*
 Control Password: *no password set*
 Setup Password: webrelay (all lower case)

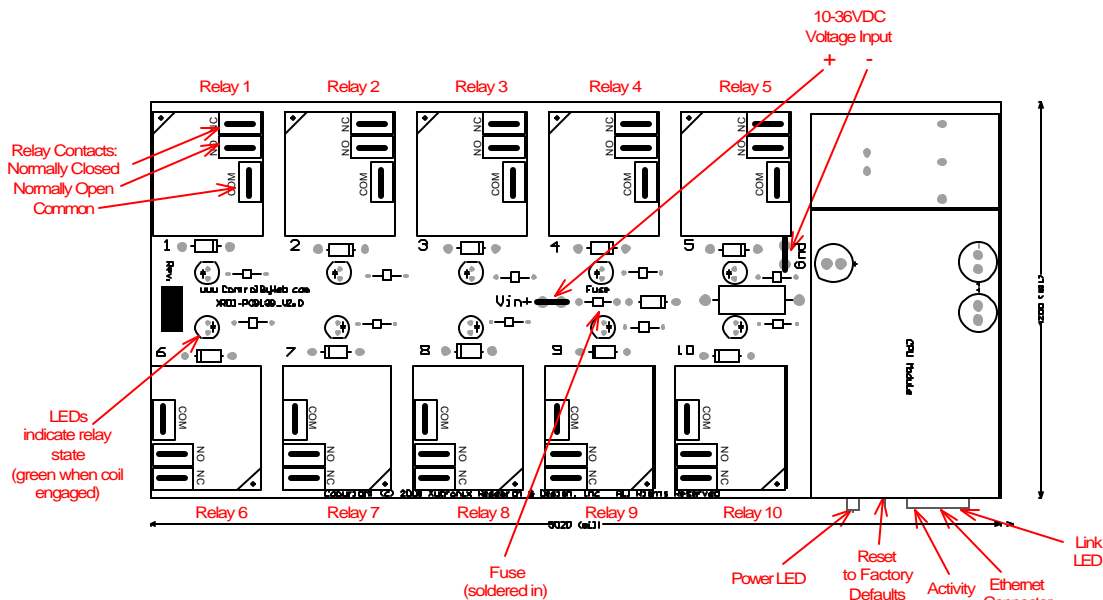

DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se

CONTROL
 by
WEB
www.ControlByWeb.com

a division of...
Xytronix Research & Design, Inc.
 North Logan, Utah, USA