

FLUSH MOUNTED CLOCKS




ZAM5-L i ZBM5-L POE+ Flush mounted

The flush mounted clocks are available with 50 mm high digits, 4-digit (HH:MM) and 6-digit (HH:MM:SS) versions. Designed to meet operating theatres standards - stainless steel casing and glass face. The clocks can be additionally equipped with a flush-mounted stainless steel remote control necessary to operate the stopwatch function. They also offer the option of an alternating time and date display. The clocks are managed via the web panel or via dedicated RGB Clock Set software.




DIMENSIONS


ZAM5-L POE+ Flush mounted

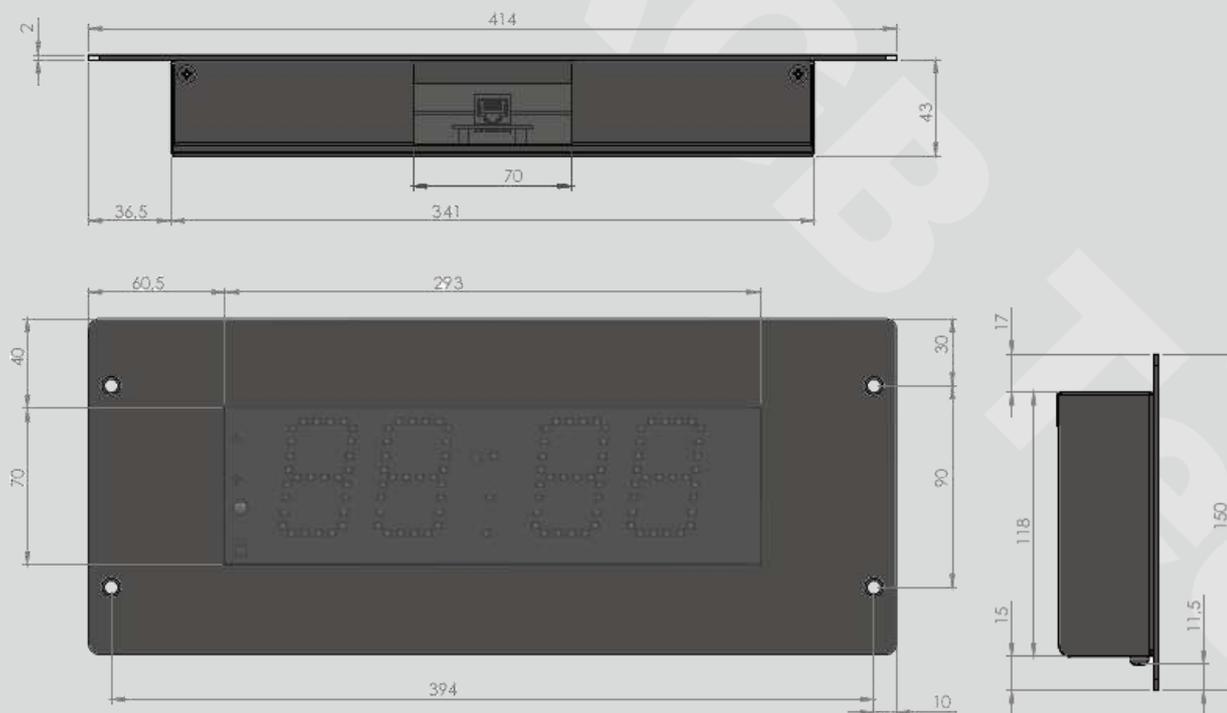

ZBM5-L POE+ Flush mounted

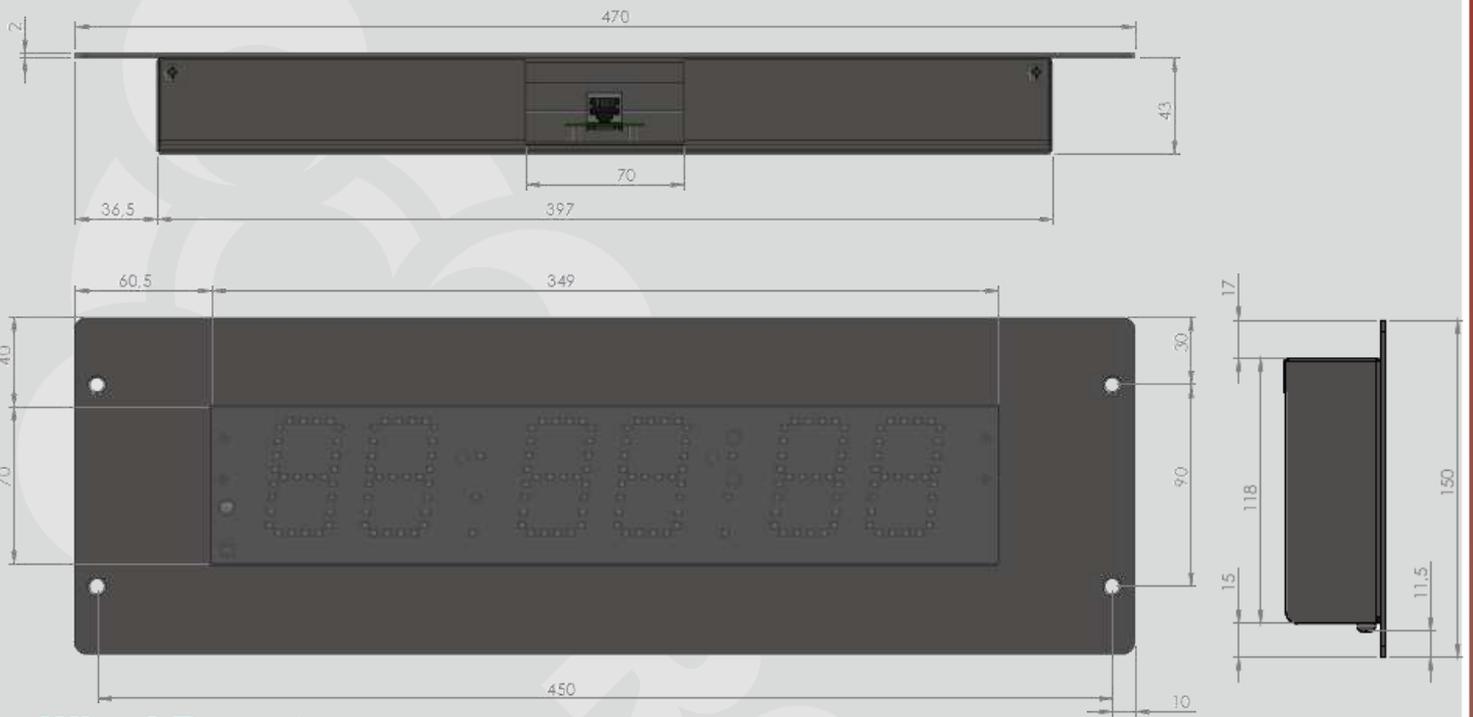

Wired Remote

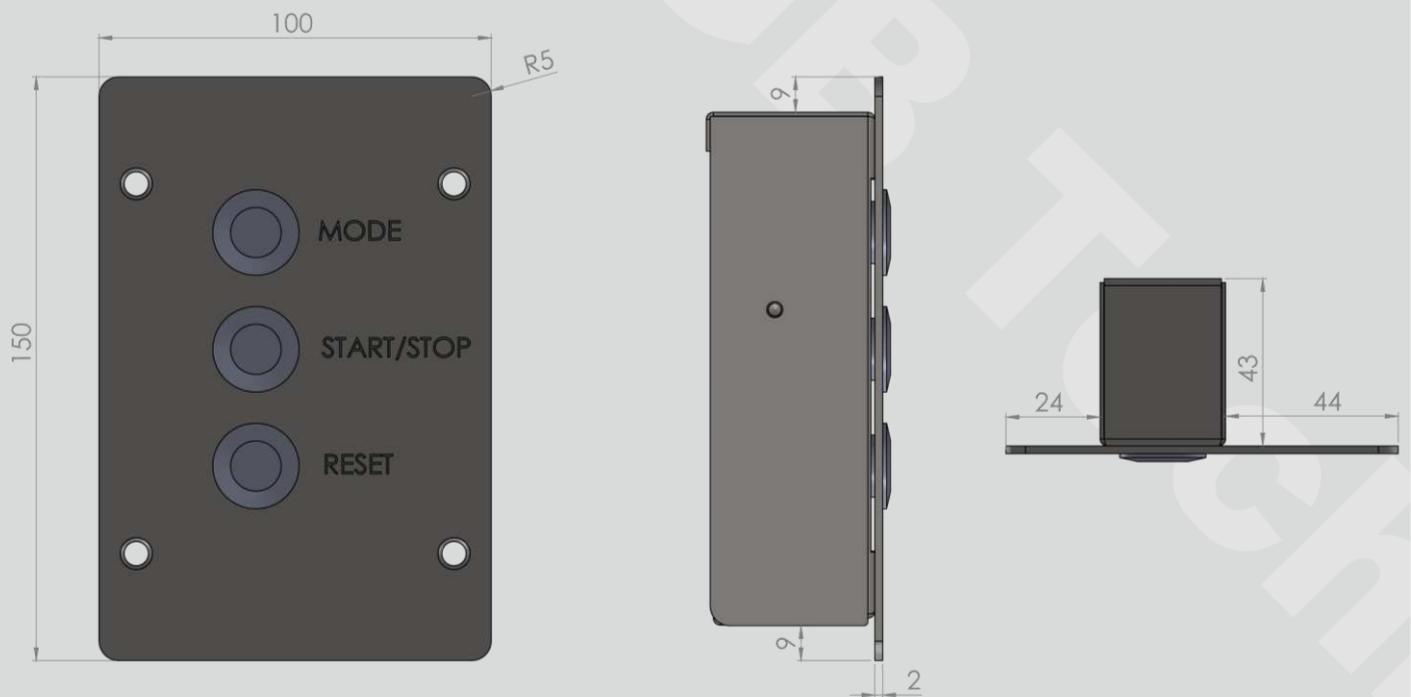

Specification

Art 20103175

Art 20103176

Model:	ZAM5-L POE+ Flush Mounted	ZBM5-L POE+ Flush Mounted
Display format:	HH:MM	HH:MM:SS
Digit height:	50 mm	
Power supply:	Power over Ethernet IEEE 802.3at Mode A	
Device operation temperature (ambient):	-25°C ÷ 45°C	
Device operation temperature (device surface):	-25°C ÷ 60°C	
Casing tightness rating IP:	66	
Average power consumption of the device:	10W	14W

- ✓ Super bright wide-angle selected LEDs
- ✓ Legibility even in direct sunlight (automatic brightness control)
- ✓ Module construction, easy installation and maintenance
- ✓ Additional functions: stopwatch,
- ✓ Clocks are operational via LAN interface, optionally with wired remote
- ✓ Possible synchronization with NTP server
- ✓ Optional accessories: GPS receiver, temperature probe,
- ✓ As standard clocks are wall flush mounted
- ✓ Stainless steel case with glass face (can be cleaned with industrial cleaning supplies)

The logo for DIREKTRONIK features the brand name in a bold, italicized, sans-serif font. The letters are white with a thick red outline, set against a yellow rectangular background.

DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se

