

Industrial 5-Port 10/100/1000T VPN Security Gateway



Powerful Industrial VPN Security Solution

The innovation of the Internet has created tremendous worldwide opportunities for e-business and information sharing. It has become essential for businesses to focus more on network security issues. The demand for information security has become the primary concern for the enterprises. To fulfill this demand, PLANET has launched the IVR-100 Industrial VPN Security Gateway, an all-in-one appliance that carries several main categories across your industrial network security deployments: **Cyber security**, SPI firewall security protection, policy auditing (**Content Filtering**, **VPN Tunnel** and **VLAN**), and easy management (**Setup Wizard**, **QoS** and **Dashboard**). Furthermore, its **Dual-WAN Failover** and **Outbound Load Balance** features can improve the network efficiency while the web-based interface provides friendly and consistent user experience. For the harsh environment, the IVR-100 can not only operate stably under temperature range from **-40 to 75 degrees C**, but also is equipped with a compact **IP30** metal case that allows either DIN-rail or wall mounting for efficient use of cabinet space.



Excellent Ability in Threat Defense

The IVR-100 built-in SPI (stateful packet inspection) firewall and anti DoS/DDoS attack functions provide high efficiency and extensive protection for your network. Virtual server and DMZ functions can let you set up servers in the Intranet and still provide services to the Internet users.

Hardware

- 5 10/100/1000BASE-T RJ45 ports
- 1 undefined Ethernet port (LAN/WAN)
- Dual-WAN function
- 1 USB 3.0 port for system configuration backup and firmware upgrade
- Reset button

Industrial Case and Installation

- IP30 metal case
- Solid DIN-rail, wall-mount or side wall-mount design
- Supports 6KV DC Ethernet ESD protection
- Fault alarm for power input failed
- DC redundant power with reverse polarity protection
- -40 to 75 degrees C operating temperature

IP Routing Feature

- Static Route
- Dynamic Route (RIPv1/v2)

Firewall Security


- Stateful Packet Inspection (SPI) firewall
- Blocks DoS/DDoS attack
- Web filtering
- MAC/IP filtering
- Blocks SYN/ICMP flooding

VPN Features

- IPSec (Host to Host)/GRE/PPTP server/L2TP/SSL(Open VPN)
- Max. Connection Tunnel Entries: 60 VPN tunnels,
- Encryption methods: DES, 3DES, AES, AES-128/192/256
- Authentication methods: MD5, SHA-1, SHA-256, SHA-384, SHA-512

Networking


- Outbound load balancing
- Failover for dual-WAN
- PPPoE/Static IP/DHCP client for WAN

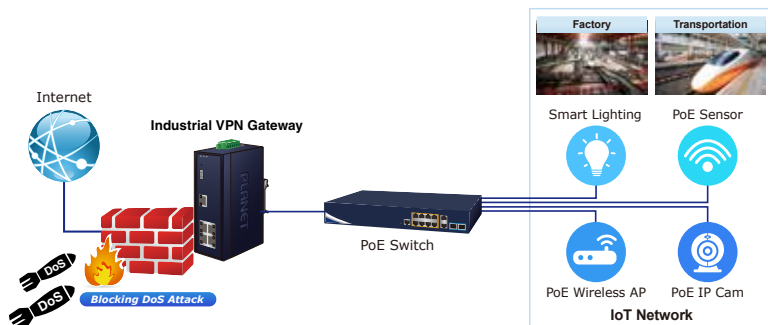

Ideal VPN Security Gateway Solution for SMBs

The IVR-100 provides complete data security and privacy for accessing and exchanging most sensitive data, built-in IPSec VPN function with DES/3DES/AES encryption and MD5/SHA-1/SHA-256/SHA-384/SHA-512 authentication, and GRE, SSL, PPTP and L2TP server mechanism. The full VPN capability in the IVR-100 makes the connection solidly secure, more flexible, and more capable.

The IVR-100 supports many popular security features including Content Filtering to block specific URL, MAC/IP filtering, outbound load-balancing and more. Furthermore, it provides higher performance with all Gigabit Ethernet interfaces which offer faster speeds for your network applications. The Gigabit user-defined interfaces flexibly fulfill the network requirements nowadays, and the dual-WAN interfaces enable the IVR-100 to support outbound load balancing and WAN fail-over features.

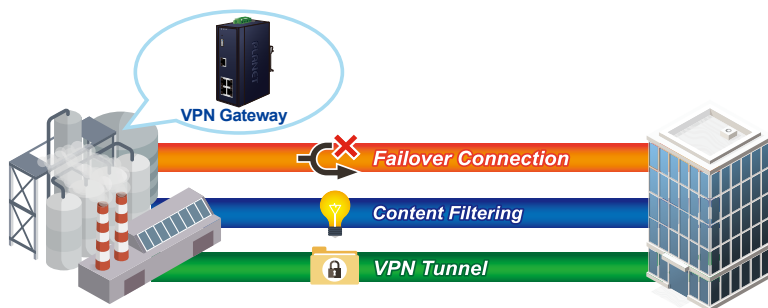

Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity feature included to protect the switch management in a mission-critical network virtually needs no effort and cost to install. For efficient management, the IVR-100 is equipped with HTTPS web and SNMP management interfaces. With the built-in web-based management interface, the IVR-100 offers an easy-to-use, platform independent management and configuration facility. The IVR-100 supports SNMP and it can be managed via any management software based on the standard SNMP protocol.

Improving Network Efficiency

The IVR-100 has link redundancy, content filtering and many more functions to make the entire network system perform better. It is applicable to the small-scale sector (from 10 to 50 people), using a compact industrial design, with five Gigabit ports (WAN/LAN). The IVR-100's economical price with complete cable management features make it an inevitable choice for the next-generation office network load balancer.


The IVR-100's built-in content filtering feature can automatically resolve the IP address corresponding to all. Users' network can be easily managed by just typing the URL of the websites like Facebook, YouTube and Yahoo.

The IVR-100 can connect dual WANs with up to two different ISPs. It creates a stable and qualified VPN connection for many important applications such as VoIP, video conferencing and data transmission.

- Protocols: TCP/IP, UDP, ARP, IPv4, IPv6
- Port forwarding
- QoS
- DMZ
- VLAN
- IGMP Proxy
- SNMP (v1/v2C/v3)
- DHCP server/NTP client
- MAC address clone
- DDNS: PLANET DDNS, PLANET Easy DDNS, DynDNS or No-IP
- Cybersecurity

Others

- Setup wizard
- Dashboard for real-time system overview
- Supported access by HTTP or HTTPS
- Auto reboot
- Configuration backup and restoration via remote/USB port
- Firmware upgrade via remote/USB port
- Event message logging to remote syslog server
- PLANET Smart Discovery utility/UNI-NMS supported

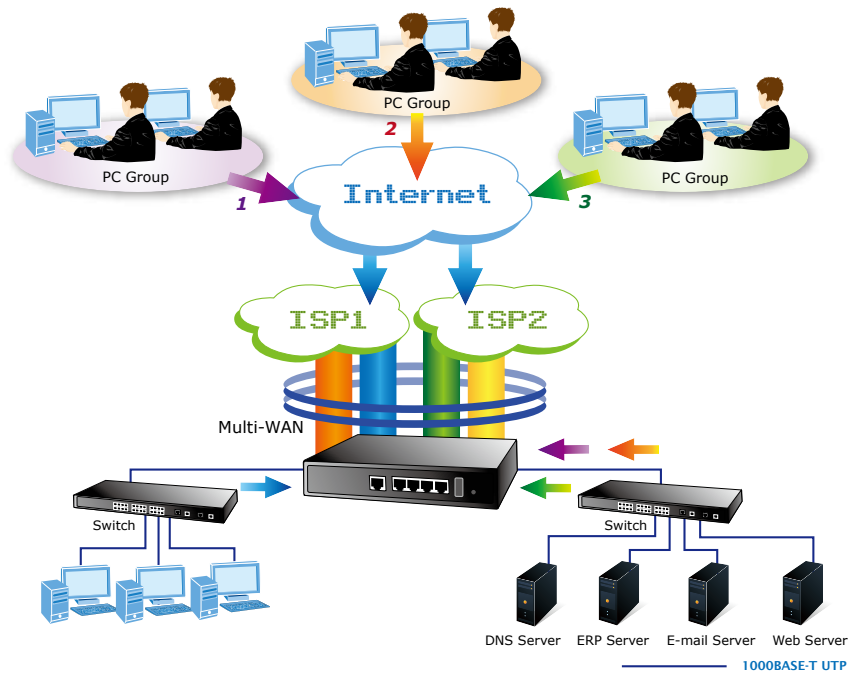


Convenient and Reliable Power System

To facilitate transportation and industrial-level applications, the IVR-100 provides an integrated power solution with a wide range of voltages (9~48V DC) for worldwide operability. It also provides dual-redundant, reversible polarity 9~48V DC power supply inputs for high availability applications.



Stable Operating Performance under Difficult Environments

Today, the VPN demand expands from commercial applications to many critical networks in the harsh environment. The IVR-100 will be one of the ideal solutions that provide a high level of immunity against electromagnetic interference and heavy electrical surges typical of environments found on plant floors or in curb-side traffic control cabinets. The IVR-100 can operate stably under temperature range from -40 to 75 degrees C which enables the users to conveniently apply the device in almost any location of the network. The IVR-100 is also equipped with a compact IP30 standard metal case that allows either DIN-rail or wall mounting for efficient use of cabinet space.

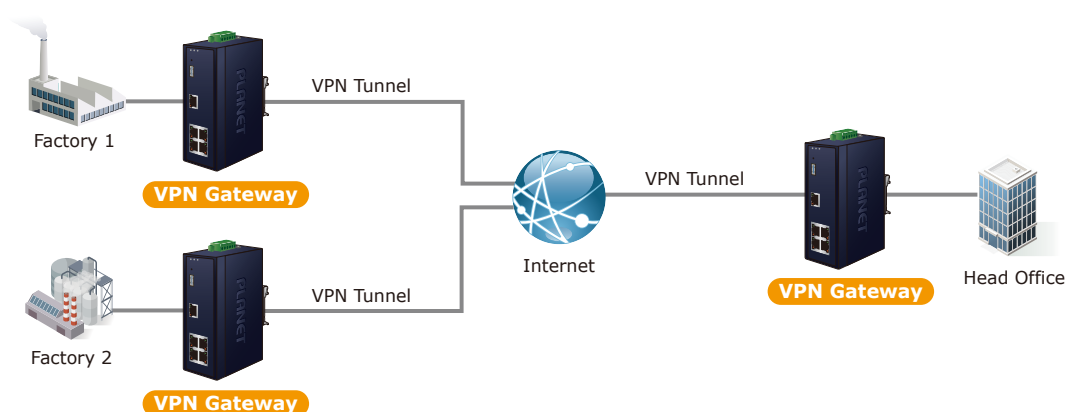


Applications

Ideal VPN Security Gateway

PLANET IVR-100 can work as a VPN security gateway in an industrial application for a company that has a factory and many different divisions. With IPSec/GRE/PPTP/L2TP/SSL VPN solutions, the IVR-100 provides secured data communication for branches, vendors, and mobile workers with a flexible way to connect back to the headquarters.

The IVR-100 connects dual WANs with up to two different ISPs. It creates a stable and qualified VPN connection for many important applications such as VoIP, video conferencing and data transmission.

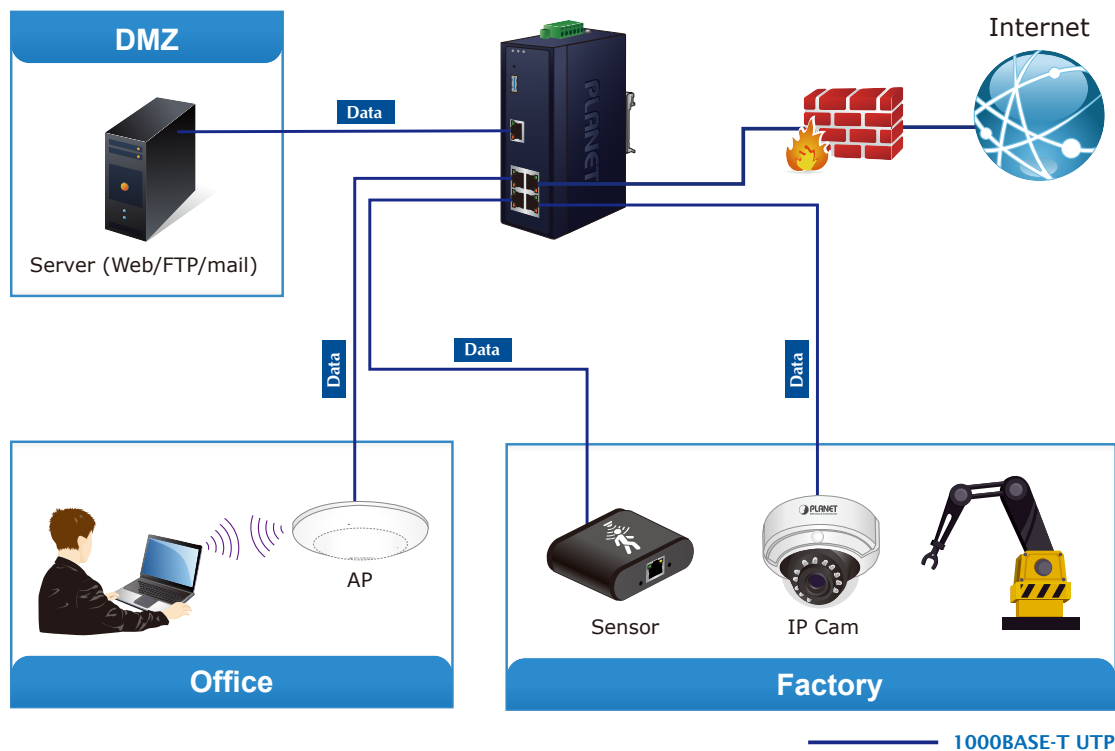

Specifications

Model	IVR-100
Hardware	
Ethernet	5 10/100/1000BASE-T RJ45 Ethernet ports including <ul style="list-style-type: none"> ■ 3 LAN ports ■ 1 WAN port ■ 1 LAN/WAN port
USB Port	1 USB 3.0 port for system configuration backup and firmware upgrade
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
Enclosure	IP30 metal case
LED Indicators	Power1/Power2 (Green) Fault (Red)
Installation	DIN-rail, wall-mount or side wall-mount design
Connector	Removable 6-pin terminal block Pin 1/2 for Power 1 Pin 3/4 for power fault alarm Pin 5/6 for Power 2
Alarm	One relay output for power failure. Alarm relay current carry ability: 1A @ 24V AC
Power Requirements	9-48V AC, 1A max.
Power Consumption	9W max.
Weight	0.53kg
Dimensions (W x D x H)	135 x 87.8 x 50 mm
ESD Protection	6KV DC
Software	
Management	Web browser
Operation Mode	Routing mode
Routing Protocol	Static route: 32 Dynamic route (RIPv1/v2): 4096
NAT Throughput	Max. 900Mbps
Firewall Security	Stateful packet inspection (SPI) Blocks DoS/DDoS attack
Outbound Load Balancing	Supported algorithms: Weight
Protocol	IPv4, IPv6, TCP/IP, UDP, ARP, HTTP, HTTPS, NTP, DNS, PLANET DDNS, PLANET Easy DDNS, DHCP, SNMP(v1/v2C/v3), PPPoE, SNMP, QoS, VLAN, IGMP Proxy
Content Filtering	MAC filtering IP filtering Web filtering
Log	System operation log Event message logging to remote syslog server
Others	Outbound load balancing Failover for dual-WAN Port forwarding DMZ Cybersecurity Dashboard Setup wizard Auto reboot PLANET Smart Discovery utility/UNI-NMS supported
VPN	
VPN Function	IPSec (Host to Host)/GRE/PPTP server/L2TP/SSL (Open VPN)
VPN Tunnels	Max. 60
VPN Throughput	Max. 100Mbps
VPN concurrent users	Max. 60
Encryption Methods	DES, 3DES, AES or AES-128/192/256 encrypting
Authentication Methods	MD5/SHA-1/SHA-256/SHA-384/SHA-512 authentication algorithm
Standards Conformance	
Regulatory Compliance	CE, FCC
Stability Testing	IEC60068-2-32 (free fall) IEC60068-2-27 (shock) IEC60068-2-6 (vibration)

Standards Compliance	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3ab Gigabit 1000T IEEE 802.1Q VLAN tagging RFC 768 UDP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP
Environment Specifications	
Operating	Temperature: -40 ~ 75 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Storage	Temperature: -40 ~ 85 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Standard Accessories	
Packet Contents	IVR-100 x 1 Quick Installation Guide x 1 Wall-mount Kit x 1 Dust Cap x 5

Ordering Information

IVR-100	Industrial 5-Port 10/100/1000T VPN Security Gateway
---------	---

Related Products

VR-100	5-Port 10/100/1000T VPN Security Router
WGR-500-4PV	Industrial Wall-mount Gigabit Router with 4-Port 802.3at PoE+ and LCD Touch Screen
CS-950	UTM Content Security Gigabit Gateway
ICG-2420-LTE	Industrial 4G LTE Cellular Gateway with 4-Port 10/100TX
ICG-2420G-LTE	Industrial 4G LTE Cellular Gateway with 4-Port 10/100TX
ICG-2510W-LTE	Industrial 4G LTE Cellular Wireless Gateway with 5-Port 10/100/1000T
ICG-2510WG-LTE	Industrial 4G LTE Cellular Wireless Gateway with 5-Port 10/100/1000T
VCG-1500WG-LTE	Vehicle 4G LTE Cellular Wireless Gateway with 5-Port 10/100TX

DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231,
Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2019 PLANET Technology Corp. All rights reserved.

IVR-100