


1 2 3 4 5 6 7 8


Connect to type2 female plug

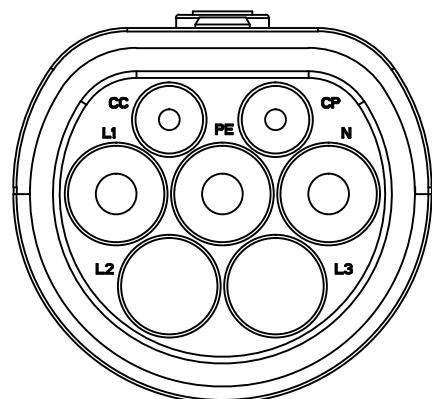



# DIREKTRONIK

Dataprodukter utöver det vanliga

Connect to type1 vehicles

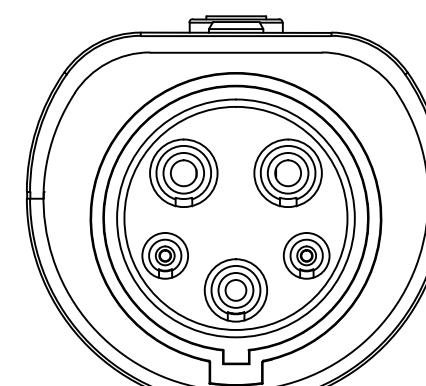

Best.nr. 20120401

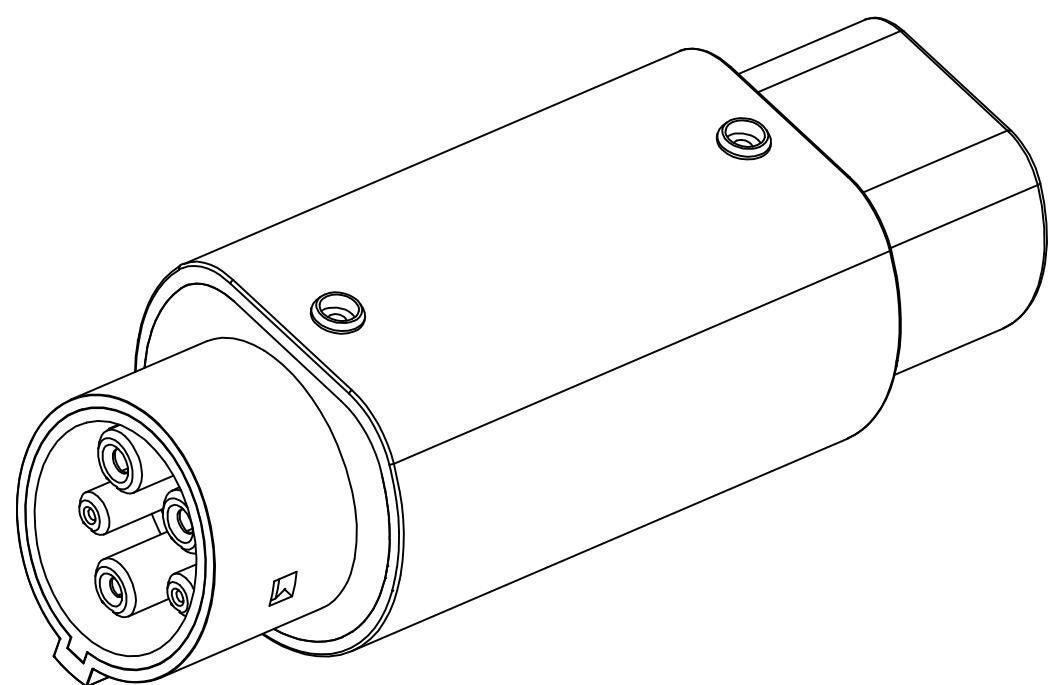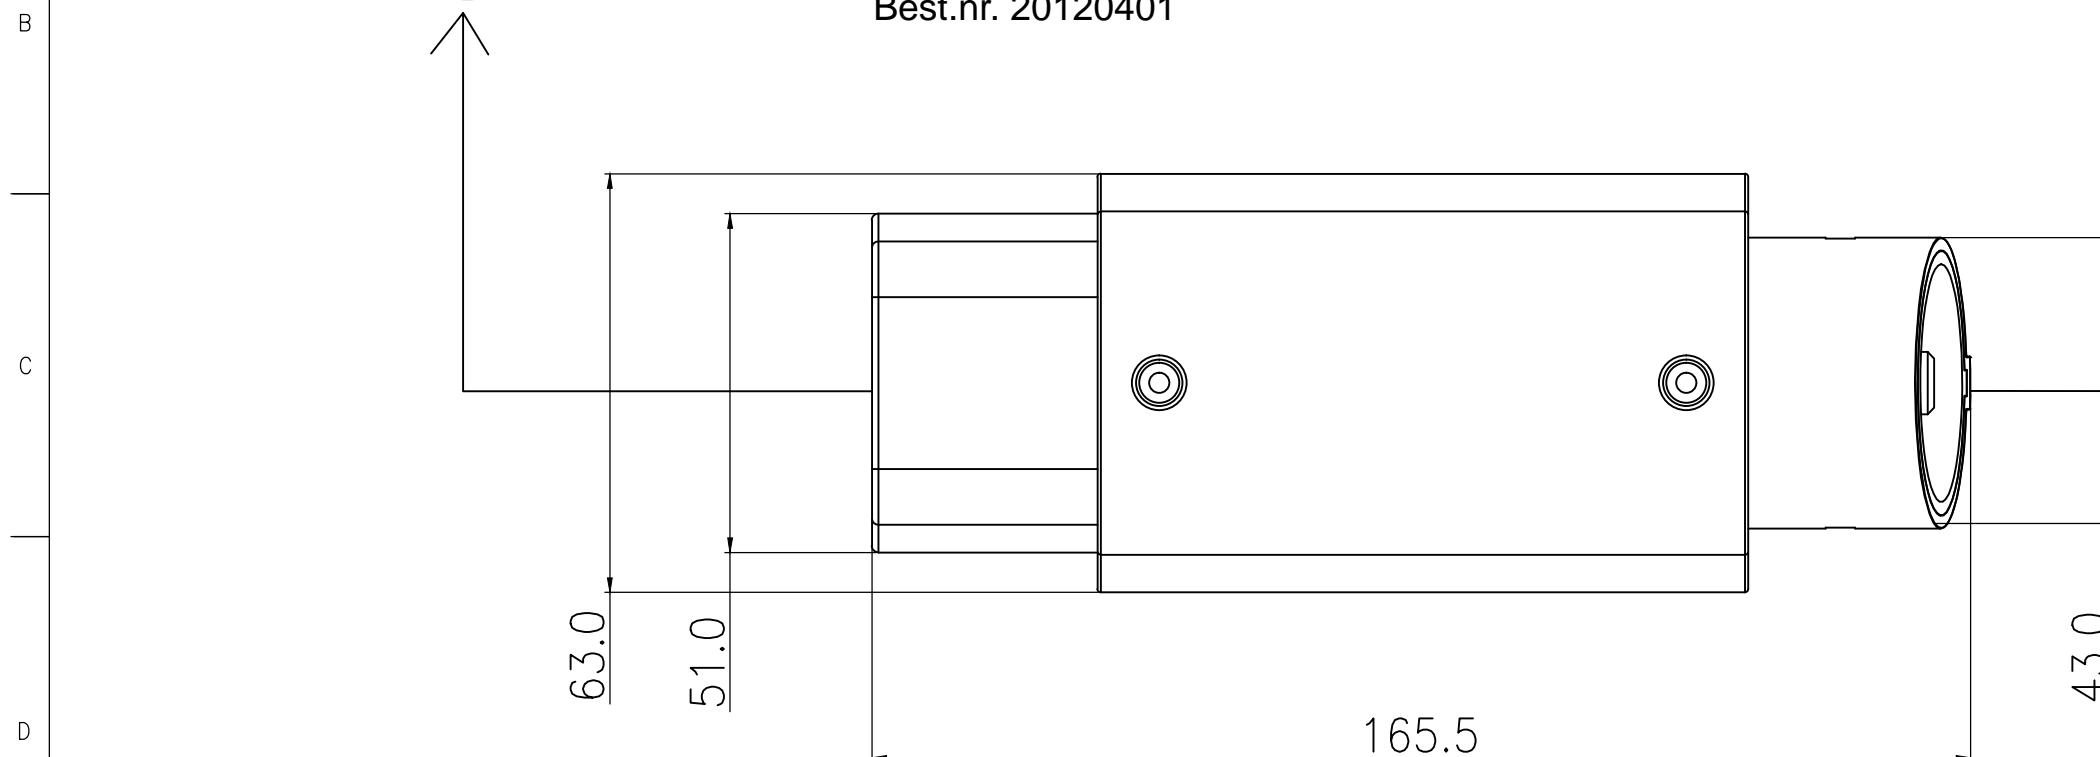

- 1.main parameters
- 2.Rated current:32A
- 3.Rated voltage:250VAC
- 4.insulation resistance:>600MΩ ,DC500V
- 5.Fireproof grade of rubber shell:UL94V-0
- 6.Waterproof grade: IP55(mating)
- 7.Plastic shell: thermoplastic plastic )
- 8.Conductor: copper alloy, silver plated surface)
- 9.Working environment temperature lated: -30°C- +50°C

版次	工程变更号	日期	修改

# DIREKTRONIK

Direktronik AB tel. 08-52 400 700 [www.direktronik.se](http://www.direktronik.se)