



| REVISION INFORMATION | | | |
|----------------------|------------|-------------|-------------------------|
| Rec. | Rec. Date | Modified By | Brief Description |
| 1 | 2023/12/15 | FW | Delete the cable marker |

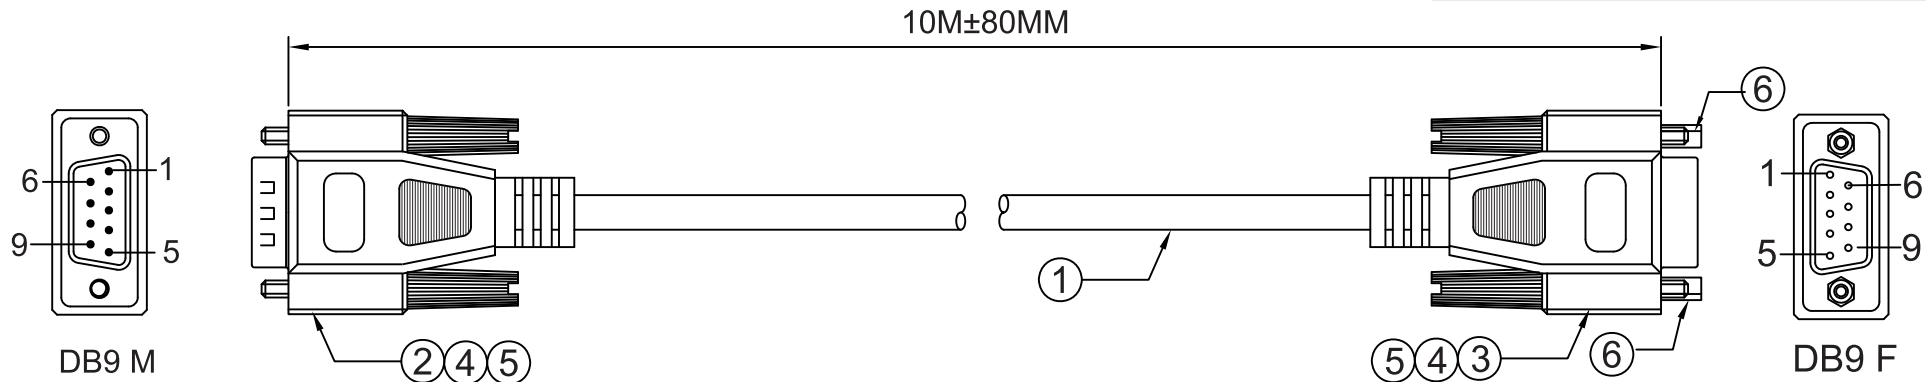

PIN OUT

| DB9 M | DB9 F |
|-------|-----------------|
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| 64 | <u>DRAIN</u> 64 |

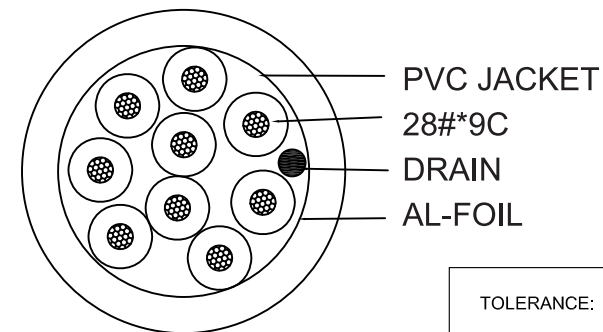

TOLERANCE:

LINEAT: X. =±1
.X =±0.5
.XX=±0.05

ANGULAR: X.° =±1°
.X° =±0°'30'

FILLET: R2=RAD.2mm
R5=RAD.5mm
XR=MAX RAD.

CHAMFER: C0.5=CHAM0.5mm
C1=CHAM1mm

NOTES:
1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. ALL MATERIAL BE RoHS COMPLIANT

| | | | | | |
|-------------|---------------------|-------|----|--------------------------------------|--------------|
| ITEM NO: | DB9/MALE-DB9/FEMALE | | | DRAWER DATE | FW 20231031 |
| TITLE | | | | CHECKED DATE | ACE 20231031 |
| CUSTOMER | | | | APPROVED DATE | |
| MATERIAL | | SCALE | | | |
| REV. | A | UNIT | MM | | |
| DRAWING NO: | 31031145 | | | Dataprodukter utöver det vanliga | |
| ACAD FILE | E:\ | | | | |

| NO. | PARTS NAME | Q'TY | SPECIFICATION |
|-----|------------|------|---|
| ⑥ | SCREW NUT | 2PCS | 4.75*6mm |
| ⑤ | HOOD MOLD | 2PCS | BEIGE PVC |
| ④ | SCREW | 4PCS | #4-40 UNC 4*40mm HOOD MOLDED: BEIGE PVC |
| ③ | DB9P F | 1PCS | NICKEL PLATED SHELL |
| ② | DB9P M | 1PCS | NICKEL PLATED SHELL |
| ① | CABLE | 1PCS | 28AWG*9C+AD+BEIGE PVC JACKET OD:5.0mm |