

# PDU Technology Specification

Date: 07/25/2023

NO.: SWDT0372307030


<b>Customer</b>	DIREKTRONIK	<b>RoHS</b>	Yes
<b>Product Name</b>	Designated Power Distribution Unit for Cabinet	<b>Customer's Code</b>	
<b>Part Number</b>	20104068	<b>Picture Code</b>	
<b>No.</b>	<b>Item</b>	<b>Detailed Description</b>	
1	Product Series	AUE2230-A	
2	Socket Type	DIN49440 16A Socket[6];	
3	Socket Quantity	6	
4	Power Input	Back input	
5	Bracket Install	Frontal installation	
6	Cable with plug	IEC60309 plug (32A 2P+E)	
7	Control Function	16A overload protector and power indicator(2)	
8	Protection Function	No protecting function	
9	Case	Black	
10	Cable Specification	3 x 6.0 mm <sup>2</sup> x 3M	
11	Product Size	L x W x H = 491 x 60 x 44.4 mm	
12	Mounting Length	468 mm	
13	Case Length	438 mm	
14	PDU Exponent		
15	Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut,	
16	Product Label	Product Name	Designated Power Distribution Unit for Cabinet
		Specification Model	20104068
		Rating voltage	250VAC 50/60Hz
		Rating Current	32A
		Max. Current	
		Max. Power	8000W
		Safety Authentication	CE
		Logo	RoHS
		Producer	
<b>No.</b>	<b>Add-In</b>		
1	Socket assemble	No	
2	Interior Connection Wire	2.5 mm <sup>2</sup>	
3	Interior Connection Style	Group connection	
4	Fix the Cable	Cable clamp(11)	
5	Module Assemble ( from left to right )	Pls refer to the drawing	

Date:

**PDU Technology Specification**

NO.:

**Preview**

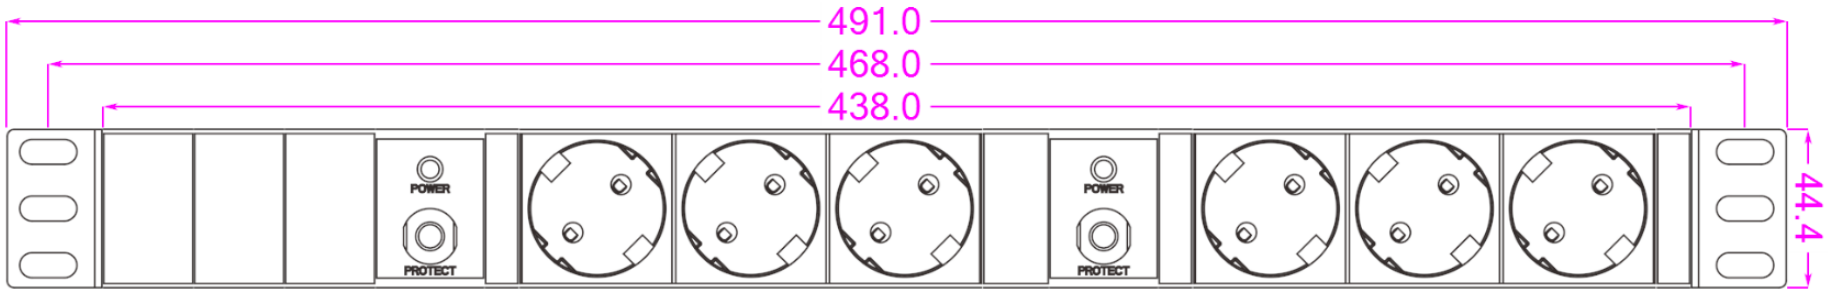

IEC60309 plug (32A 2P+E)

DIMENSION AND TOLERANCES (Unit: mm)			Direktronik	
Length:	Mounting length:		Customer	
Width:	Case length:		Product name	Designated Power Distribution Unit for Cabinet
Height:	case tolerance: $\pm 1.0$		Part number	20104068
	SIGN	DATE	Customer's code	
DRAWN			Drawing number	
CHK'D			Edition number	
APP'D				