

Specification

Part Number 20117351

Input

Nominal Voltage Frequency	400V 50/60Hz
Phase	Three phase
Plug type	IEC60309 (32A 380VAC 3P+N+E) Legrand
Power Cord Spec	5 x 6.0mm ² x 2 meters
Max input current	32A per phase
Rated input current	32A per phase
Wiring Style	L-N wiring
Power Capacity	22000W

Output

Nominal Voltage	230V
Max output current	32A per phase
Output Connections	1 x female IEC60309 (32A 380VAC 3P+N+E) plug (Legrand) with 5 x 6.0mm ² x 2 meters cable

Protections

Circuit Overload Protection	None
Surge Suppression	None

Metering

Input/Phase/Circuit Metering	Yes
Breaker Status Monitoring	Yes
Metering Accuracy	+/- 1%
Environmental Monitoring	Temperature, Humidity
Monitoring Parameters	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Energy (kWh), Power Factor, Frequency(Hz)

Communication

Access	SNMP (V1,V2,V3), Http/Https, Telnet, Modbus-RTU
Alerts	Voltage, Current, (Temperature, Humidity optional)
Service	TFTP, SMTP
Daisy-chain	1 Master 4 Slaves

Physical

Product Dimensions (HxWxD)	480.5 x 60 x 44.4 mm
Box Dimensions (HxWxD)	540*140*70mm
Product Weight	4.5 KG
Box Weight	5KG
Mounting Style	Both side brackets
Mounting Distance	457.5mm



Environmental

Operating Temperature	-10~45°C
Operating Relative Humidity	5%~95%
Operating Elevation	0~3000 meters

Compliance

EMC Verification	EN55022, EN61000
Safety Verification	IEC/EN 60950, IEC/EN 62368
Environmental Verification	RoHS 2.0

Drawing

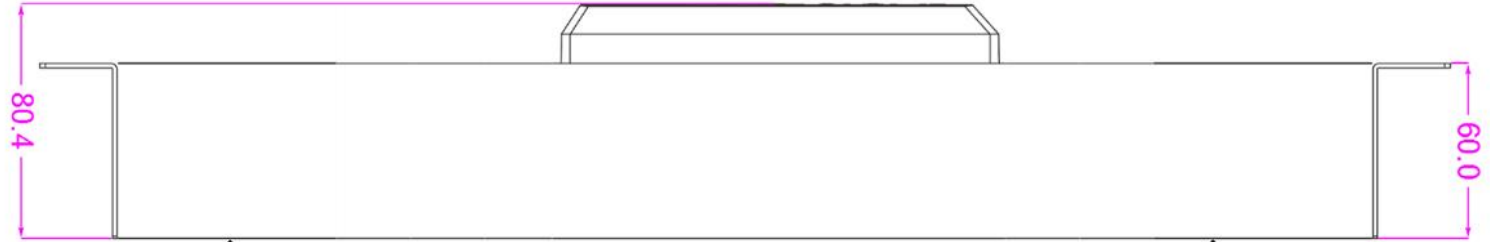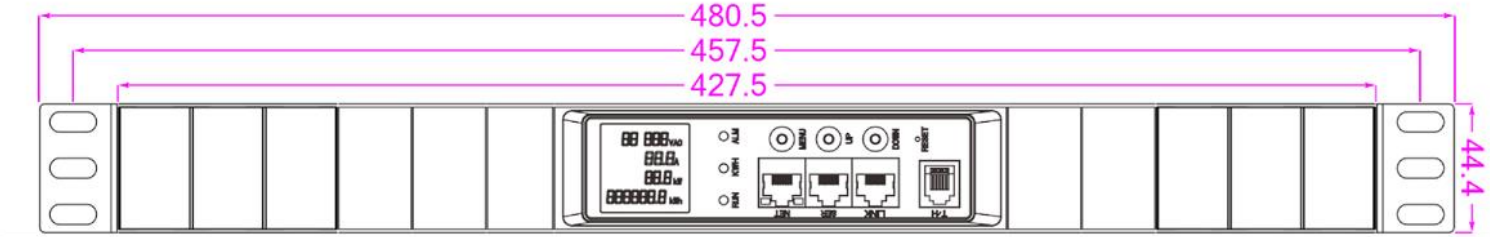

↑
Cable input with male plug



↑
Cable output with female plug

