

Best.nr: 20100860

802.3at Gigabit PoE Injector

1. INPUT :

- 1.1 Input Voltage: AC 90V ~ 264V @120V/230V
- 1.2 Input Frequency : 47 ~ 63hz
- 1.3 Input Current: 0.75A at 120Vac @F.L
0.39A at 230Vac
- 1.4 Inrush current: 25A Max at 120Vac & 50A Max at 230Vac

2. OUTPUT :

2.1 Output Voltage & Current:

OUTPUT	+56V
Max. load	0.625A
Power	35W Max
Min. Load	0A
Load reg. %	5%
Line reg. %	1%
Ripple %	1%
Noise %	2%

TOTAL POWER :35 W

Note 1: Ripple & Noise bandwidth is from DC to 20Mhz. Terminated With a 47uF Capacitor and 0.1uf MPE Capacitor of Proper Polarity.

3. EFFICIENCY : 80% min. at AC 120V Input @F.L

4. PROTECTION

4.1 Short Circuit Protection

Output Short GND Terminal will not damage the Power Supply will Auto-Recover when Load status back to normal.

4.2 Over Voltage Protection : 59V ~ 65V

4.3 Over Current Limits : 150% ~ 200% @90V ~ 240Vac

4.4 Input with Fuse Protection


5. EMC : Meet FCC Class B EN55022 Class B

5.1 SAFETY STANDARD : Meet UL1950, CSA 22.2 &TUV EN60950-1

5.2 Hold up time :6mS min. at maximum load &120Vac Input.

6. GENERAL DESCRIPTION

- 6.1 Operation Temperature: - 25 - +50 °C
- 6.2 Storage Temperature: -40 - +85 °C
- 6.3 Operation Humidity: 5% - 90%RH (non-condensing)
- 6.4 Cooling: Free air cooling
- 6.5 SIZE 125*72*38 (L*W*H)

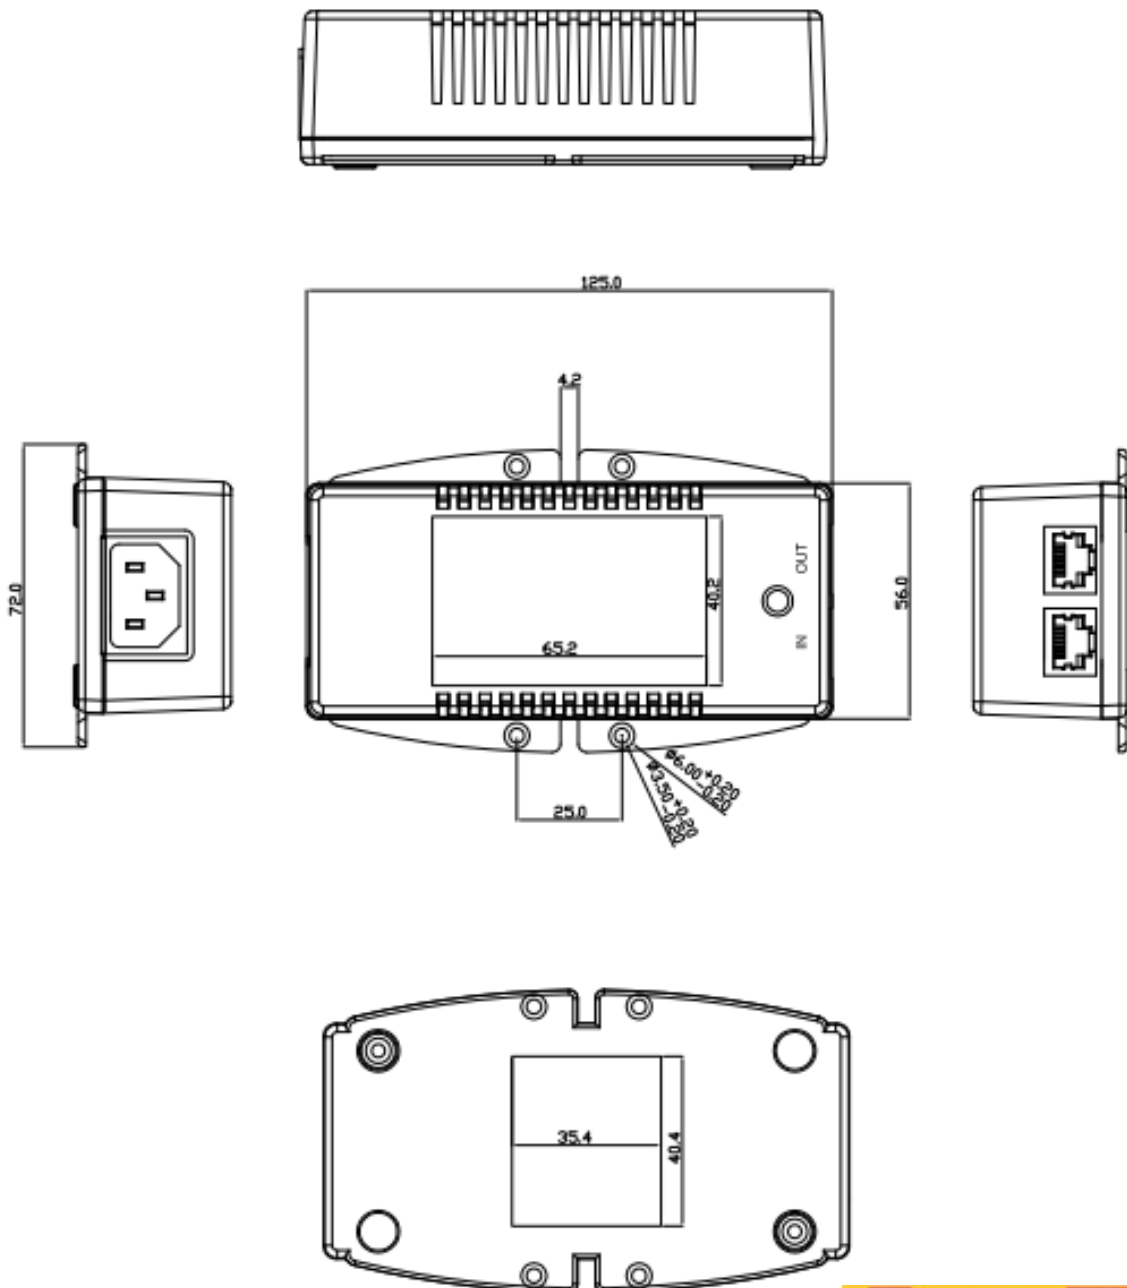

7. RJ45 pins definition: @1000MBASE

RJ-45 Input (Data Only)			RJ-45 Output (Data & Power)	
Pin	Symbol	Description	Symbol	Description
1	BI_DA+	Data Pair A+	BI_DA+	Data Pair A+
2	BI_DA-	Data Pair A-	BI_DA-	Data Pair A-
3	BI_DB+	Data Pair B+	BI_DB+	Data Pair B+
4	BI_DC+	Data Pair C+	+Vdc + BI_DC+	power(+)+Data Pair C+
5	BI_DC-	Data Pair C-	+Vdc + BI_DC-	power(+)+Data Pair C-
6	BI_DB-	Data Pair B-	BI_DB-	Data Pair B-
7	BI_DD+	Data Pair D+	-Vdc + BI_DD+	power(-)+Data Pair D+
8	BI_DD-	Data Pair D-	-Vdc + BI_DD-	power(-)+Data Pair D-

8. Indicator:

LED (RED) POE output ready

LED (GREEN) POE normal output to 802.3at application

SPEC. of SURGE/LIGHTNING PROTECTION

	Signal
Operating Voltage	Data 5V
Clamping Voltage	Data 16.5V (@I PP =5A, t p =8/20μs, I/O pin to GND)
Peak Pulse Current	20A (tp=8/20μs)
Pin Protected	All 8 pin protected
Max. Shut Capacitance	<3pF (VR = 0V, f = 1MHz, I/O pin to GND) < 1.5 pF (VR = 0V, f = 1MHz, Between I/O pins)
IEC COMPATIBILITY (EN61000-4)	IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact) IEC61000-4-4 (EFT) 40A (5/50ns) IEC61000-4-5 (Lightning) 20A (8/20μs)