

#### 12~48VDC Power Input Industrial Gigabit PoE+ Injector

### Features

- ► 12~48VDC Power Input
- ▶ 1 RJ45 Ethernet Data Input Port + 1 RJ45 Power Over Ethernet Output Port(Data + Power)
- ➤ Support IEEE802.3at Power over Ethernet(PoE+) Power Sourcing Equipment
- ► Support 10/100/1000Base-TX
- ► Support DIN-Rail & Wall-mount installation.
- ► Extensive LED indicators for PoE diagnostics
- ► Environmentally Hardened -40° C to 80° C operating temperature




### Overview

The 20101865 product is a Hardened Gigabit High Power PoE Injector allows you to connect the IEEE 802.3 af/at PoE device such as camera and access point with a non PoE LAN switch within the distance of 100m.

Both the Ethernet port (to switch) and the PoE Out port (to PoE device) support 10/100/1000Base-T and are compliant with IEEE 802.3ab. The PoE Out port is also compliant with IEEE 802.3 af/at.

20101865 provides an integrated power solution with a wide range voltage of 12~48VDC for high availability applications.

# Application

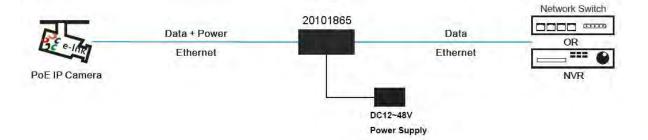

### Technical Indexes

Ethernet		
Standards:	IEEE802.3af Power over Ethernet	
	IEEE802.3at Power over Ethernet	
Processing Type:	Forward	
	Half-duplex, Full-duplex	
Forward Filter Rate:	1,488,000pps (1000Mbps)	
Cabling:	10/100/1000Base-T: Cat5 or above	
Maximum Distance:	Cat5 UTP up to 100m	
Connector:	2x RJ45	
Environmental		
Operating Temperature:	-40°C to 80°C (-40°F to 176°F)	
Storage Temperature:	-40°C to 85°C (-40°F to 185°F)	
Relative Humidity:	5% to 95% non-condensing	
MTBF:	>200,000hrs	
Electrical and Mechanic	cal	
Input Power:	12~48VDC (Terminal Block)	
Power Consumption:	36W Max.	
PoE (Power over Etherr	net)	
Standard:	IEEE802.3af/at	
Port:	RJ45	
Power Pin Assignment	4/5(+), 7/8(-)	
Max. Power per Port:	30W Max per port (Alternative B Mode)	
LED Indicators:		
Power:	Power Status	
PoE:	PoE Status	
Dimensions (WxDxH):	95 x 70 x 30 mm	
Weight:	0.25Kg	
Casing:	Aluminum Case	
Mounting Options:	DIN-Rail / Wall-mount	
Regulatory Approvals		
ISO9001		
FCC part 15, Class A		
	www.direktronik.col.info@direktronik.col. 146.9 E24.00 700	

EN55022:2006+A1: 2007 Class A	
Surge Protection:	
RJ45: 1KV	
Power: 500W	
ESD: 4KV/8KV	

## Ordering Information

Model	Description
20101865	12~48VDC Power Input Industrial Gigabit PoE+ Injector
Mounting Options	▶ Default DIN-Rail Bracket installed, Wall Mount Bracket is included.
Power Options	► Power Supply is to be purchased separately