

802.3af/at/bt 26400 mAh Power Bank

DIREKTRONIK


Dataprodukter utöver det vanliga

Best.nr: 20109774

Product Specifications:

Ports:

- USB-C (In/ Out)
- USB-A (Out)
- 24V PoE (Out)
- LAN (In)
- PoE++ 802.3af/at/bt (Out)
- LAN (RJ45 Gigabit)
- PoE Output: 802.3af/at/bt 24V Gigabit PoE
- USB-A Output: 5V/3A, 9V/2A, 12V/1.5A 18W (max.)
- LED: Battery Indicator Light (100%, 75%, 50%, 25%)
- USB-C (Input/ Output)
 - USB-C Input: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
 - USB-C Output: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A, PPS 3.3-21V/3A
- Battery Type: Lithium Polymer Battery
- Battery Capacity: 26400mAh/ 98Wh
- Recharging Time: 3Hrs

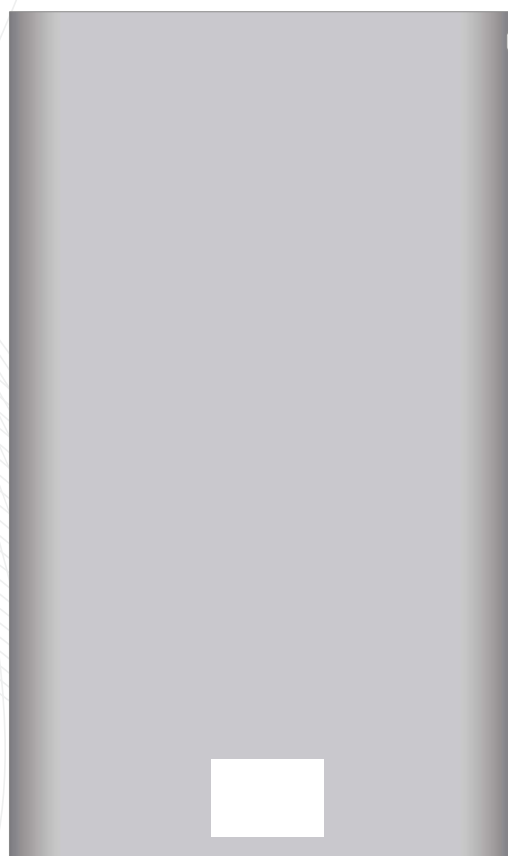


Overview

20109774 Power Bank is the perfect accessory for any WISP technician or wireless engineer. Power your devices with USB-A, USB-C, 24V PoE, and PoE++ (802.3bt). Carry 26400 mAh of power with you up a tower to remotely power your devices.

20109774 Power Bank is temperature resistant and also features protection from various factors such as input overvoltage, output overvoltage, short circuit, and incorrect insertion.

Using Instruction

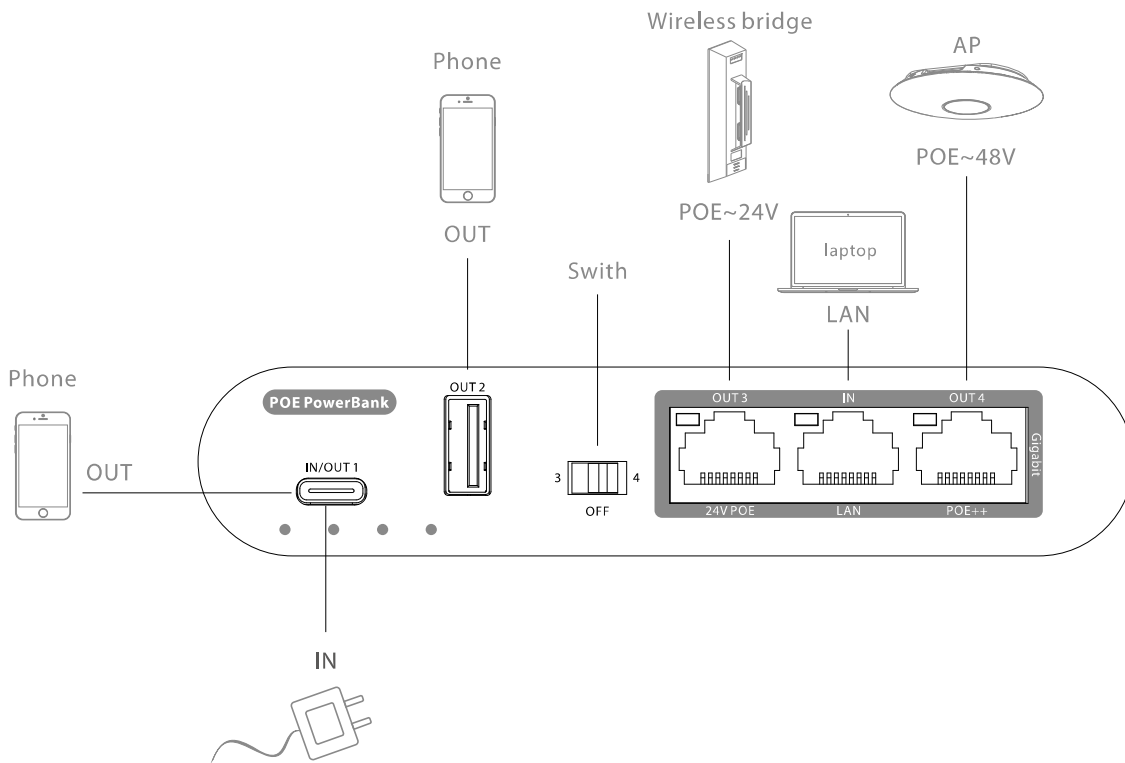

Application

