


Converter Cable Adapter USB 3.1 Type C to HDMI 1.4

DIREKTRONIK



TYPE-C

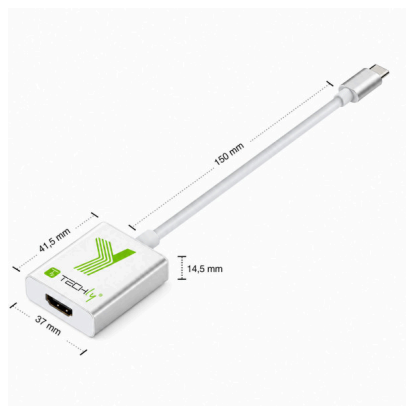

HDMI

Item 20113158




IADAP USB31-HDMI converter allows you to connect an additional HDMI monitor to your desktop or laptop's USB port.

This way you can watch videos or slideshows together on the big screen.

Features

- Input type C standard USB3.1 and HDMI output
- USB connector for easy connection reversible C IN / OUT
- Supports data rates of 5.4 Gbps linear (HBR2), 2.7 Gbps (HBR) and 1.62 Gbps (RBR)
- Supports resolutions up to 3840x2600 @ 60Hz (mirror mode)
- Converter flexible USB 1.4 to HDMI type C 5G
- Supports multiple color formats: RGB 6/8/10/12-bit per component (bpc) and YCbCr4: 4: 4, YCbCr4: 2: 2.8 / 10 / 12bpc
- Supports HDMI 1.4 and earlier



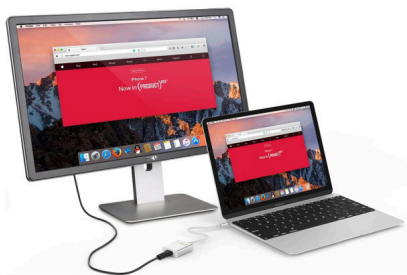

- Supports resolutions: 4Kx2K, 24 Hz, 25 Hz, 30 Hz; 1080P, @ 24 Hz, 50 Hz, 60 Hz; 720P, 480P, 576i, 480i, @ 50Hz and 60Hz
- Supports HDMI audio
- USB bus powered (no external power required)

Technical specifications

- Entry: 1x USB 3.1 Type C Male
- Output: 1x HDMI 1.4 Female
- Maximum resolution: 3840x2600

Environmental Characteristics

- Operating Temperature: 0-45 ° C
- Operating Humidity: 10% -85% (non-condensing)
- Storage Temperature: -10 / 80 ° C
- Storage Humidity: 5% -90% (non-condensing)

Dimensions

- Width: 41.5 mm
- Depth: 37 mm
- Height: 14.5 mm
- Cable length: 150 mm

Certifications

- EC
- FCC

Package Contents

- 1x USB converter C / HDMI
- 1x User Manual

COD IADAP USB31-HDMI

BARCODE 8054529020409

SUPPLIER CODE 020409



SE



NO

Direktronik AB | Box 234 , 149 23 Nynäshamn | Besöksadress Konsul Johnsons väg 15 149 45 Nynäshamn
Telefon 08 52 400 700 | Fax | Epost info@direktronik.se | Org.nr 556281-9663 | Bankgiro 922-0179



Description

IADAP USB31-HDMI converter allows you to connect an additional HDMI monitor to your desktop or laptop's USB port.
This way you can watch videos or slideshows together on the big screen.

Features

- Input type C standard USB3.1 and HDMI output
- USB connector for easy connection reversible C IN / OUT
- Supports data rates of 5.4 Gbps linear (HBR2), 2.7 Gbps (HBR) and 1.62 Gbps (RBR)
- Supports resolutions up to 3840x2600 @ 60Hz (mirror mode)
- Converter flexible USB 1.4 to HDMI type C 5G
- Supports multiple color formats: RGB 6/8/10/12-bit per component (bpc) and YCbCr4: 4: 4, YCbCr4: 2: 2.8 / 10 / 12bpc
- Supports HDMI 1.4 and earlier
- Supports resolutions: 4Kx2K, 24 Hz, 25 Hz, 30 Hz; 1080P, @ 24 Hz, 50 Hz, 60 Hz; 720P, 480P, 576i, 480i, @ 50Hz and 60Hz
- Supports HDMI audio
- USB bus powered (no external power required)

Technical specifications

- Entry: 1x USB 3.1 Type C Male
- Output: 1x HDMI 1.4 Female
- Maximum resolution: 3840x2600

Environmental Characteristics

- Operating Temperature: 0-45 ° C
- Operating Humidity: 10% -85% (non-condensing)
- Storage Temperature: -10 / 80 ° C
- Storage Humidity: 5% -90% (non-condensing)

Dimensions

- Width: 41.5 mm
- Depth: 37 mm
- Height: 14.5 mm
- Cable length: 150 mm

Certifications

- EC
- FCC

Package Contents

- 1x USB converter C / HDMI
- 1x User Manual



SE



NO

Direktronik AB | Box 234 , 149 23 Nynäshamn | Besöksadress Konsul Johnsons väg 15 149 45 Nynäshamn
Telefon 08 52 400 700 | Fax | Epost info@direktronik.se | Org.nr 556281-9663 | Bankgiro 922-0179



Data sheet

GENERAL			
Brand	TECHLY	Barcode	8054529020409
Weight	0.0270	Supplier Code	020409
Years Of Warranty	2		
TECHNICAL SPECIFICATIONS			
Length	0,15 m	Connector A Type	USB Type-C™
Shape A Connector	male	Connector B Type	HDMI-A
Shape B Connector	female	Standard USB	USB 3.0/3.2
Gold-Plated Connectors	No	Cable Size (AWG)	-
Color	White	Certifications	EC, FCC
DIMENSIONS			
Height	14,5 mm	Width	37 mm
Depth	41,5 mm		



SE



NO

