



UNIT: mm

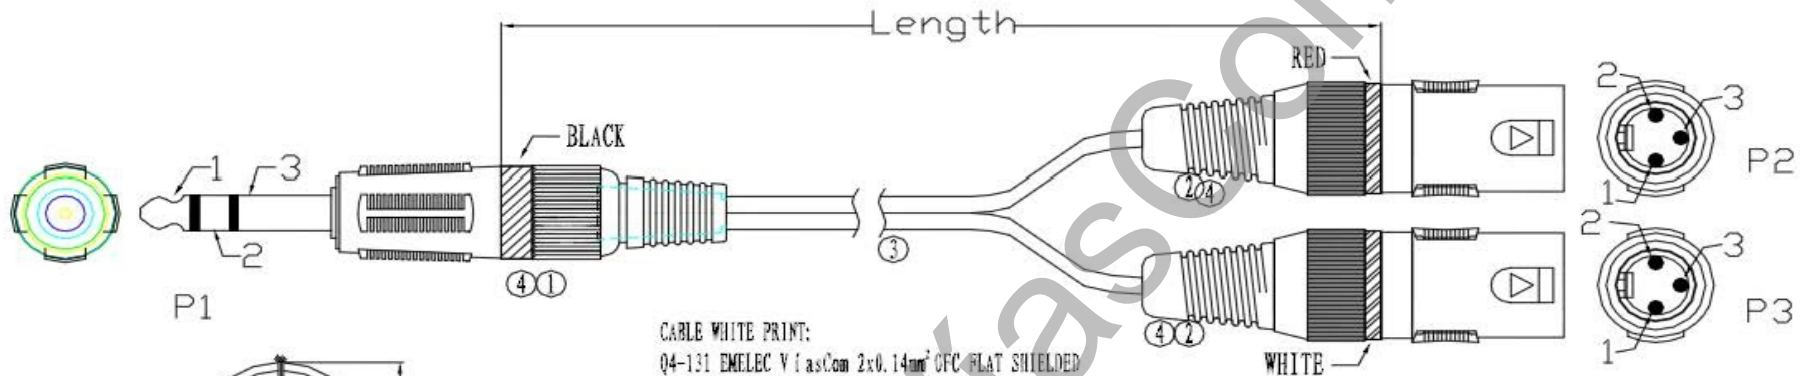

CABLE WHITE PRINT:
Q4-131 EMELEC ViasCom 2x0.14mm² CFC PLAT SHIELDED

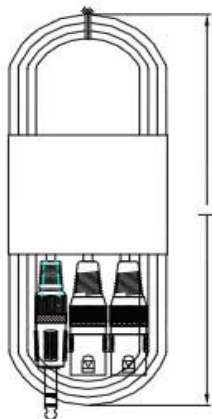

EMELEC P/N	Length (mm)	COLOR BOX (mm)	WINDING L
EQ620701S	1500 ± 30	90*60*10	260 ± 20mm
EQ620703S	3000 ± 30	90*60*10	260 ± 20mm
EQ620705S	5000 ± 50	90*60*10	260 ± 20mm

NOTE:

1. Open/Short test: 100%;
2. Conductor Resistance: 3 ohm;
3. Insulation Resistance: 10M ohm;
4. Hi-Pot: 400V/DC;

PIN ASSIGNMENT		
P1	P2 (RED)	P3 (WHITE)
1	2 RED	
2		2 WHITE
3	1+3	1+3 DRAIN

NO.	NAME	QTY	SPECIFICATION
④	TUBE	7	CLEAR OD: 3.0mm L=10 ± 2mm
③	CABLE	1	Q4-131 BLACK 0.14mm ² [(18/0.1BC)/1C+S(40/0.1BC)]*2F OD: 3.8*7.6mm
②	CONN	1+1	XL3MX MALE XLR CABLE CONNECTOR SOLIDER TYPE WITH RED AND WHITE RING (EQ9001/BR-BW)
①	CONN	1	NP3X JACK 6.3 STEREO X-Series SOLIDER TYPE WITH BLACK RING (EQ9016/B)

DRAWN BY		DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	EQ6207XXS
DECIDE BY		DATE	2015-04-16
VERSIONS/EDITION	A/0	PROJECTION	