

Audio & Video Integrated ePTZ

for Conferencing & Education and Telemedicine

 $PUS-V200C\ is a 4 KePTZ Camera with integrated audio and video function, compact\ structure$ $design, all-metal appearance design, The Camera is adopted Sony's new\ generation of 1/2.5-inch$ 4 KExmorimages ensor with built-inultra-wide-angle

 $130 - degree autofocus lens, easy too perate, Support USB3.0 and HDMI dual interface simultaneous video output, them aximum resolution is 4K@30 FPS, and 1080 Pvideo format supports 4XD igital zoom, Built-in high-fidelity microphone, maximum pickup distanceup to 8 meters, no need to install any driver, compatible with various common videos Production and conferencing software, with low illumination, low latency, clear picture quality and delicate video quality functions. tanbe configured with a vertical angleof <math>30^\circ$ Adjustable bracket, support desktop, computer/note book, large screen, monitor and other video capture and application.


t an total ly meet the demand of Conferencing, Telemedicine, Education, Remote Recruitment, Court System & Live Streaming application.





4K Ultra HD 2160P@30FPS

with wide of application ranged



Education **☑**

Court System ☑


Live Streaming application ☑



130° Horizontal Super Wide Angle

4K with 130° Horizontal of View, 4X 1080P@60fps with 68° HOV



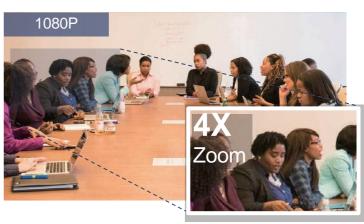



Rubik's Cube Appearance

More Stable Quality & More Reliable

It can be configured with a vertical angle of 30° Adjustable bracket





Desktop

■ PC/Laptop

Touchboard

■ Tripod



High-quality High-fidelity Audio Input

8 meters long distance, 360° Voice pickup

Deep Echo Cancellation ☑

Dynamic Noise Suppression ☑

Super Compatible

Super Compatible All Video Application & Conferencing System Apk or Software

☑ Windows ☑ IOS ☑ Android ☑ Linux



Specifications

Camera	VideoSystem	Sony1/2.5"CMOS,EffectivePixel 4K@3820*2160
	VideoOutput Format	4K@30fps; 1920*1080P@60fps/50/30/25fps; 1080I@60fps/50fps; 720p@60fps/50fps;320*480
	Lens1	F=3.5mm FOV110°
	Lens2(Default)	F=2.8mm FOV130°
	AutoFocus	Support
	MinIllumination	0.02Lux@ F1.8,AGCON)
	Shutter	1/30s~1/10000s
	WhiteBalance	Auto/Indoor/Outdoor/ONEPUSH, Manual
	CameraBrackets	BracketswithDamper Support±30°adjustment
	Digital NoiseReduce	2D,3D
	BLC	Support
	WDRON/OFF	Support

Audio Function	Built-in Microphone	YES	
	Audio Transmission	USB3.0	
		VoicePickupRange	8Meters

HDMI Interface	VideoOutput	4K@30fps; 1920*1080P@60fps/50/30/25fps; 1080I@60fps/50fps; 720p@60fps/50fps;320*480
	Encoding	H.265/H.264/MJPEG
	AudioOutput	N/A
	ePTZ	Support,4XDigitalZoom@1080P
	Interface	USB3.0TypeBFemale (Compatible with all interfaces below USB3.0, support video, control, power supply, audio inputand output)
		HDMI2.0 (Compatible with HDMI2.0,1.4,1.3A,1.3 and other interfaces, only supports video transmission)
		·

USB Function	VideoOutput	4K@30fps; 1920*1080P@60fps/50/30/25fps; 1080I@60fps/50fps; 720p@60fps/50fps;320*480
	Encoding	H.265/H.264/MJPEG
	UVCProtocol	Support
	Video Communication	UVC1.0-UVC1.5

Generic	InputVoltage	5V(USB3.0)
	Operation Temperature	-10°C-+50°C (14)
	Storage Temperature	-40°C~60°C
	Power Consumption	TBD
	MTBF	50000hours

Products Picture

