

# Mid Range Ultrasonic Level Sensor


## Series: 19-0272



The IRU-2420 series provides a non-contact method of detecting level, presence/absence detection, volume, proximity and distance. With built in technology to compensate for unpredictable variables such as humidity, temperature and agitators the IRU-2420 is the right sensor for mid-range, all-purpose applications.

### Features

- AutoSense Software for hassle-free setup
  - Internal Temperature Compensation
  - Works on solids and liquids
  - Ranges up to 25 ft.
  - CSA Class I, Division 2 Certification
-

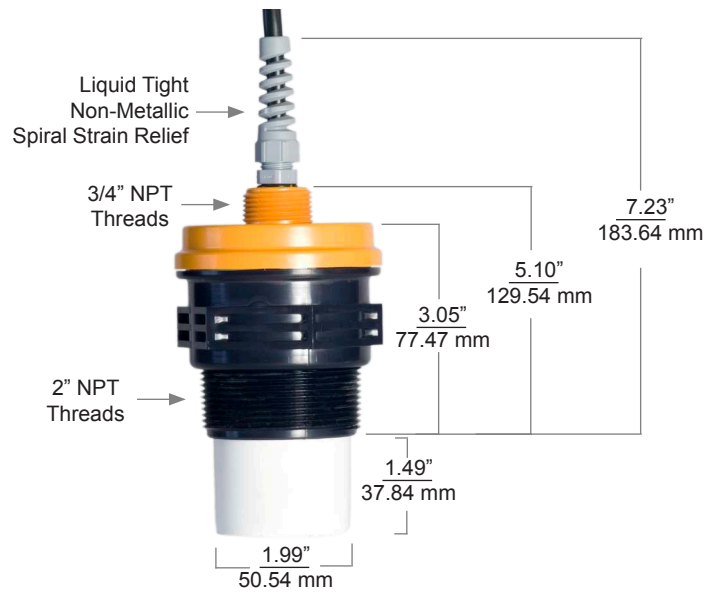

### Performance

- Operating Range  
1 - 25 ft. (0.3 - 7.6 m)
- Beam Pattern: 9° off axis
- Internal Temperature Compensation
- Frequency: 69 kHz
- Accuracy: ±0.25% of detected range
- Resolution: 0.1 in. (2.5 mm)
- Response Time: Programmable (20 ms minimum)

### Connectivity

Output:

- 4-20 mA  
600 ohms @ 24 VDC  
150 ohms @ 12 VDC
- 4-20 mA with (2) NPN outputs

### Environmental

- Ratings: IP65
- Operating Temp: -40° - 140°F (-40° - 60°C)

### Electrical

- Total Current Draw: 75 mA @ 24 VDC
- Supply Voltage: 12-28 VDC
- Wiring Connection: 4 or 5 conductor shielded cable

### Programming

- Interface with RST-3001/3002 Programmer (purchase separately - powered by USB)  
-The RST-3001 is 32 bit only  
-The RST-3002 is 32 and 64 bit compatible
- User selected units of measure

### Physical

- PVDF (Kynar®) transducer housing
- PC/PET upper housing
- Transducer Type: Ceramic, PVDF faced

### Certification

- Class 1, Div. 2, Groups A, B, C, D
- IP65



**DIREKTRONIK**

Direktronik AB tel. 08-52 400 700 [www.direktronik.se](http://www.direktronik.se)

