

# Wireless Water Turbidity Sensor

---

Wireless Sensor Network Based on LoRa Technology



Fig. R72610 Appearance (subject to the actual object)

## Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology.

The specifications are subjected to change without prior notice.

---

## Wireless Water Turbidity Sensor

---

### Introduction

R72610 is a wireless communication device for turbidity detection. R72610 can detect the turbidity of the solution. The host body and the turbidity sensor communicate through RS485. The turbidity sensor can also detect the water temperature and transmit the detected data to other devices through the wireless network for display. It adopts wireless communication method that conforms to LoRa™ protocol Standard.

### Operating Principle

The turbidity sensor adopts ZS-206A integrated inline turbidity sensor that designed and manufactured according to the principle of scattered light turbidity measurement. When a beam of light enters the water sample, the light is scattered because of the turbidity material in the water sample. The turbidity of the water sample is calculated by measuring the intensity of the scattered light perpendicular to the incident light and comparing the measured value with the internal calibration value. Last, the final value is output after linearization processing. The turbidity sensor of R72610 communicates with LoRa module through RS485.

### Main Feature

- Adopt SX1276 wireless communication module
- Solar panel charging function
- A rechargeable battery box (Users can purchase and install rechargeable lithium batteries by self.)
- Water temperature detection
- Turbidity concentration detection
- Compatible with LoRaWAN™ Class A
- Frequency hopping spread spectrum
- Configuring parameters and reading data via the third-party software platforms, and set alarms via SMS text and email (optional)
- Applicable to the third-party platforms: Actility/ThingPark, TTN, MyDevices/Cayenne
- Low power consumption and long battery life

Note\*:

Battery life is determined by the sensor reporting frequency and other variables, please refer to [http://www.netvox.com.tw/electric/electric\\_calc.html](http://www.netvox.com.tw/electric/electric_calc.html)

On this website, users can find battery life of various models in different configurations.

---

## Wireless Water Turbidity Sensor

---

### Application

- Smart home
- Smart farm
- Livestock breeding

### Dimension (Host Body)

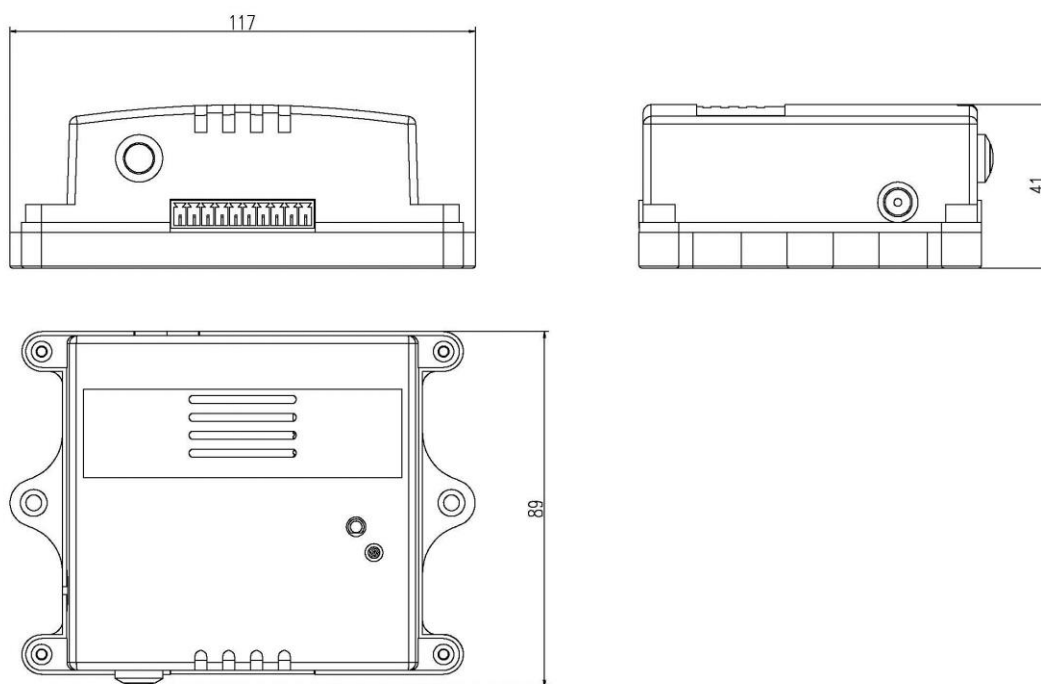


Fig. Host Body Case Dimension

(Unit: mm)

---

**Wireless Water Turbidity Sensor**


---

**Electric**

Power Supply	3 rechargeable lithium batteries in series (each section of rechargeable lithium battery 3.7V)
Operating Voltage Range	9.8VDC~12.6VDC
Low Voltage Warning	10.5V
Operating Current	<100mA (when sensor is operating)

**Battery Electric**

Solar Panel Specification	5W / 18VDC
Lithium battery specification	3 rechargeable lithium batteries in series (each section of rechargeable lithium battery 3.7V)
Lithium Battery Pack Charging Current	About 300mA (ensure sufficient sunshine intensity)
Lithium Battery Pack Charging Time	About 4 days to charge fully (Ensure sufficient sunshine intensity, the value is calculated with a rechargeable battery capacity being 3200mah)
The Time That the Lithium Battery Pack Can Be Used After Full Charged Once	About 770 hours (typical value, report the data once every 15 minutes, the value is calculated with a rechargeable battery capacity being 3200mah)

**Frequency**

Frequency Range	863MHz-928MHz 470MHz-510MHz
TX Power	US915 20dbm AS923 16dbm AU915 20dbm CN470 19.15dbm EU868 16dbm KR920 14dbm IN865 20dbm
Receive Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate=293bps) -121dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Built-in antenna
Communication Distance	10km(visible linear obstacle-free transmission distance, actual transmission distance depending on the environment)
Data Transfer Rate	0.3kbps~50kbps
Modulation Method	LoRa/FSK (Note: choose one of them)
Supportable LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923, CN470-510 (Note: The frequency band is optional and needs to be configured before shipment.)

---

 Wireless Water Turbidity Sensor
 

---

**Turbidity Sensor**

Model	ZS-206A
Measurement Principle	Scattering light method
Measurement Range/Resolution	0~1000NTU/ 0.1NTU/ 0.1°C
	0~100NTU/ 0.1NTU/ 0.1°C
	0~20NTU/ 0.01NTU/ 0.1°C
Accuracy	±5% or ±3NTU(0~1000NTU) ±3% or ±2NTU(0~100NTU) ±3% or ±1.5NTU(0~20NTU) ±0.5°C
Calibration	Two Point Calibration
Temperature Compensation	Automatic temperature compensation (Pt1000)
Output Mode	RS-485 (Modbus/RTU)
Operation Condition	0~50°C, <0.2MPa
Storage Temperature	-5~65°C
Installation Method	Immersive installation, 3/4NPT pipe thread
Cable Length	5 meters, other lengths can be customized
Power Consumption	<0.3W@12V
Power Supply	12~24VDC±10%
Protection Class	IP68

**Physical**

Dimension	117mm*89mm*41mm
Operating Temperature Range	-20°C ~ 55°C
Operating Humidity Range	<90%RH (No condensation)
Storage Temperature Range	-40°C ~ 85°C