

# Waterproof Long Range Wireless LoRa Sensor Node

## LSN50 v2



## OVERVIEW:

LSN50v2 is a Long Range LoRaWAN Sensor Node. It is designed for outdoor use and powered by Li/SOCI2 battery for long term use, power consumption and secure data transmission. It is designed to facilitate developers to rapidly deploy industrial level LoRaWAN and IoT solutions. LSN50 v2 helps users to turn the idea into a practical application and make the Internet of Things a reality. It is easy to program, create and connect your things everywhere.

LSN50v2 is based on SX1276/SX1278 allows the user to send data and reach extremely long ranges at low data-rates. It provides ultra-long range spread spectrum communication and high interference immunity whilst minimising current consumption. It targets professional wireless sensor network applications such as irrigation systems, smart metering, smart cities, building automation, and so on.

LSN50v2 uses STM32L0x chip from ST, STM32L0x is the ultra-low-power STM32L072xxxx microcontrollers incorporate the connectivity power of the universal serial bus (USB 2.0 crystal-less) with the high-performance ARM® Cortex®-M0+ 32-bit RISC core operating at a 32 MHz frequency, a memory protection unit (MPU), high-speed embedded memories (192 Kbytes of Flash program memory, 6 Kbytes of data EEPROM and 20 Kbytes of RAM) plus an extensive range of enhanced I/Os and peripherals.

LSN50v2 is an open source product, it is based on the STM32Cube HAL drivers and lots of libraries can be found in ST site for rapid development.

## Features:

- STM32L072xxxx MCU
- SX1276/78 Wireless Chip
- Pre-load bootloader on USART1/USART2
- MDK-ARM Version 5.24a IDE
- I2C, LPUSART1, USB
- 2x12bit ADC, 1x12bit DAC
- 18xDigital I/Os
- LoRa™ Modem
- Preamble detection
- Baud rate configurable
- CN470/EU433/KR920/US915
- EU868/AS923/AU915
- Open source hardware / software
- Available Band: 433/868/915/920 Mhz
- IP66 Waterproof Enclosure
- Ultra Low Power consumption
- AT Commands to change parameters
- 4000mAh Battery for long term use

## Dragino Technology Co., Limited


Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad  
LongCheng Street, LongGang District ; Shenzhen 518116, China  
Direct: +86 755 86610829 | Fax: +86 755 86647123

**WWW.DRAGINO.COM**  
sales@dragino.com

# Waterproof Long Range Wireless LoRa Sensor Node

## LSN50 v2

### Pin Definition

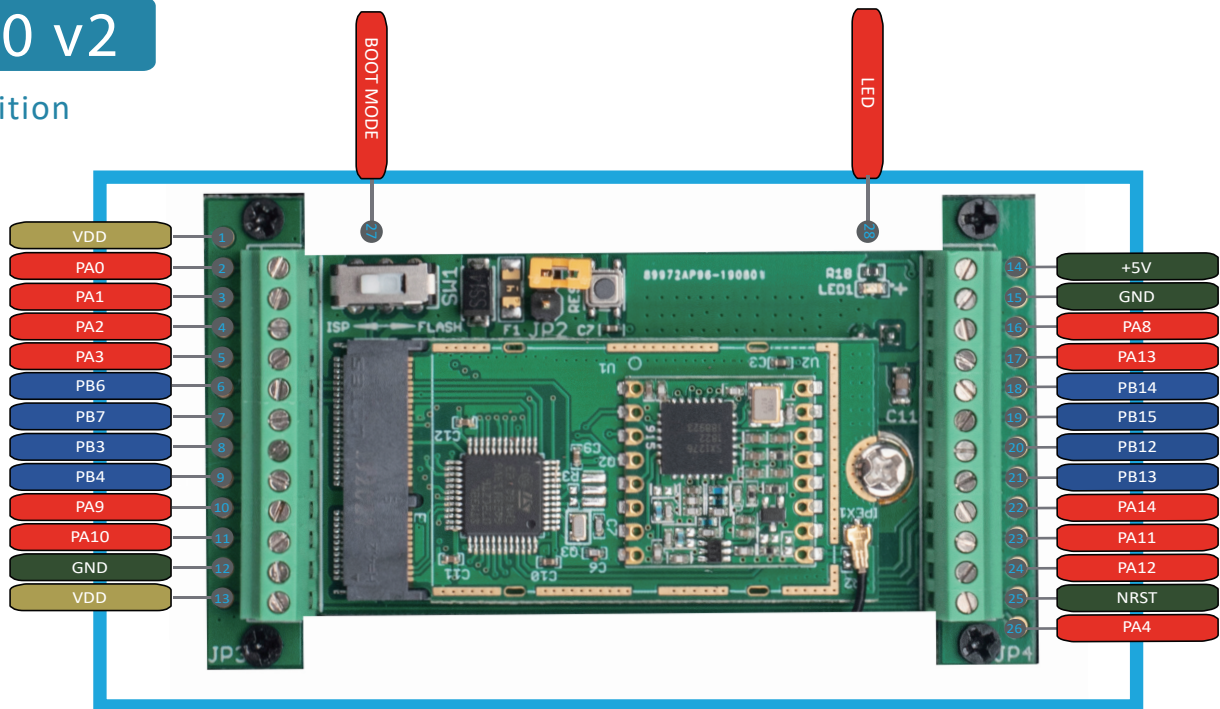

### Specifications:

#### MCU Side:

- MCU: STM32L072xxxx
- Flash: 128KB
- RAM: 20KB
- EEPROM: 6KB
- Clock Speed: 32Mhz

#### LoRa Side:

- LoRa Chip: sx1276/sx1278
- 68 dB maximum link budget.
- +20 dBm - 100 mW constant RF output vs.
- +14 dBm high efficiency PA.
- Programmable bit rate up to 300 kbps.
- High sensitivity: down to -148 dBm.
- Bullet-proof front end: IIP3 = -12.5 dBm.
- 127 dB Dynamic Range RSSI.
- LoRaWAN 1.0.3 Specification

#### Absolute Maximum Ratings:

- I/O pins: 0.5v ~ VCC+0.5V

#### Common DC Characteristics:

- Supply Voltage: 2.1v ~ 3.6v
- Operating Temperature: -40 ~ 85°C
- I/O pins: Refer to STM32L072 datasheet

#### Power Consumption:

- STOP Mode: 2.7uA @ 3.3v
- LoRa Transmit Mode:  
125mA @ 20dBm  
44mA @ 14dBm

#### Battery:

- Li/SOCI2 unchargable battery
- Capacity: 4000mAh or 8500mAh
- Self Discharge: <1% / Year @ 25°C
- Max continuously current: 130mA
- Max boost current: 2A, 1 second

### Applications:

- Wireless Alarm and Security Systems
- Home and Building Automation
- Automated Meter Reading
- Industrial Monitoring and Control
- Long range Irrigation Systems, etc.

### Dimensions:

- Size: 101 x 40 x 42mm
- Net Weight: 140g

### Order Info: LSN50v2-XX-YY-ZZ

#### XX:

- XX: Frequency Bands, options:  
EU433, CN470, EU868, IN865, KR920  
AS923, AU915, US915

#### YY:

- 12: With M12 waterproof cable hole
- 16: With M16 waterproof cable hole
- NH: No Hole

#### ZZ:

- 4: with 4000mAh battery
- 8: with 8500mAh battery

## Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad  
LongCheng Street, LongGang District ; Shenzhen 518116, China  
Direct: +86 755 86610829 | Fax: +86 755 86647123

**WWW.DRAGINO.COM**  
sales@dragino.com