

# 70m 4x4 HDMI 2.0 HDBaseT Matrix

with 4 hdmi loop out

Best.nr: 20110220


[18G] [HDCP2.2] [HDR]  
[4K2K@60Hz, YUV 4:4:4]



## Features

- Incorporate HDBaseT technology
- 4 x HDMI input and 4 x HDBaseT output with 4 x HDMI Loop out
- HDMI 2.0 version support 4K@60Hz YUV4:4:4, 8bit, 18G, HDR10
- Transmit up to 70m under 1080p, 40m under 4K@60Hz
- With wide-band Bi-Direction IR routed control (38~56KHz)
- HDCP 2.2/1.4 compliant.
- Support 4x Analog Audio input
- Support 4x Analog Audio and 4x SPDIF Audio extraction output
- Support Panel Button with LCD, IR Routing, RS232, TCP/IP, PC Tool Control
- Support POC (Receiver powered by HDBaseT Matrix)
- Support Micro USB for FW updating

HDMI cable  
RS232 cable  
Cat5e/6 cable  
Audio cable

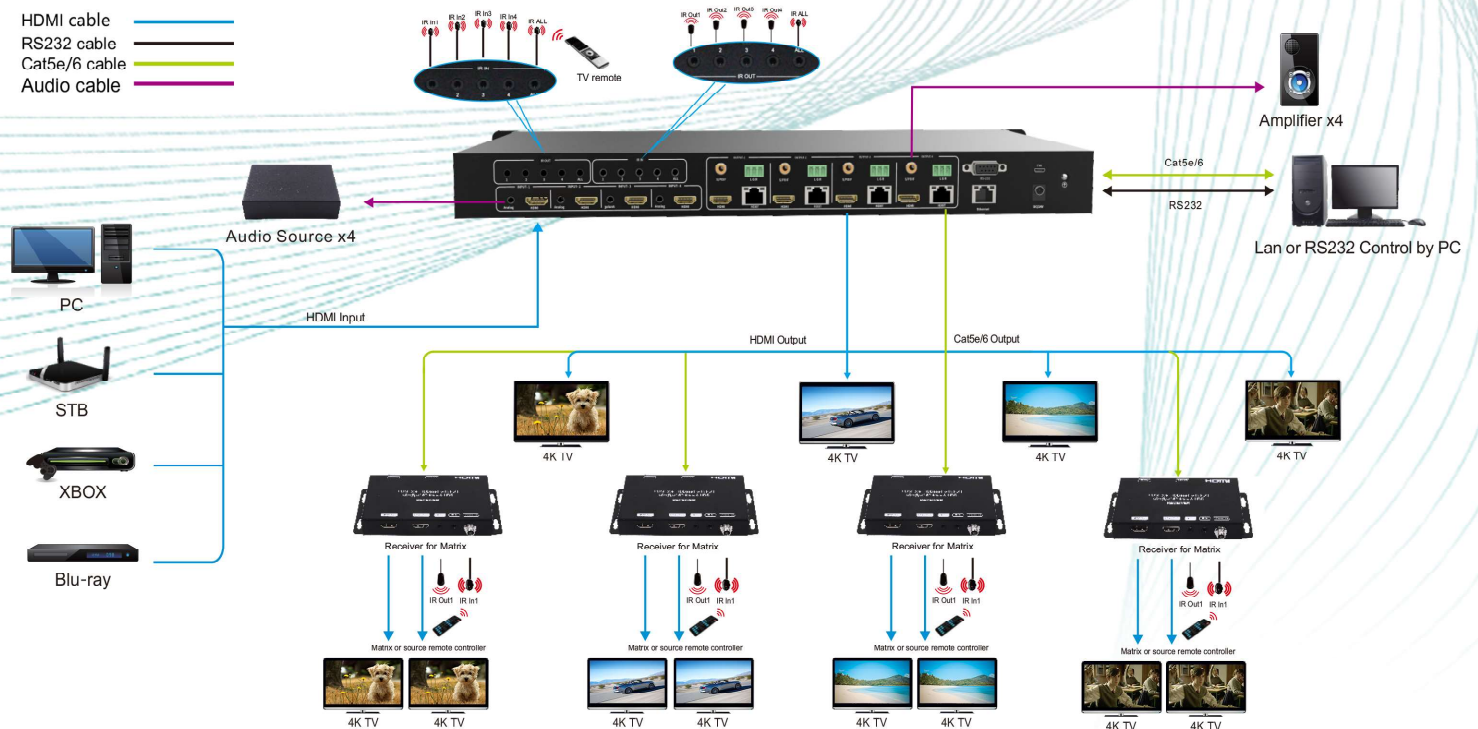

**DIREKTRONIK**  
Dataprodukter utöver det vanliga