Best.nr. från 125-0630 till 125-0640

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
1					

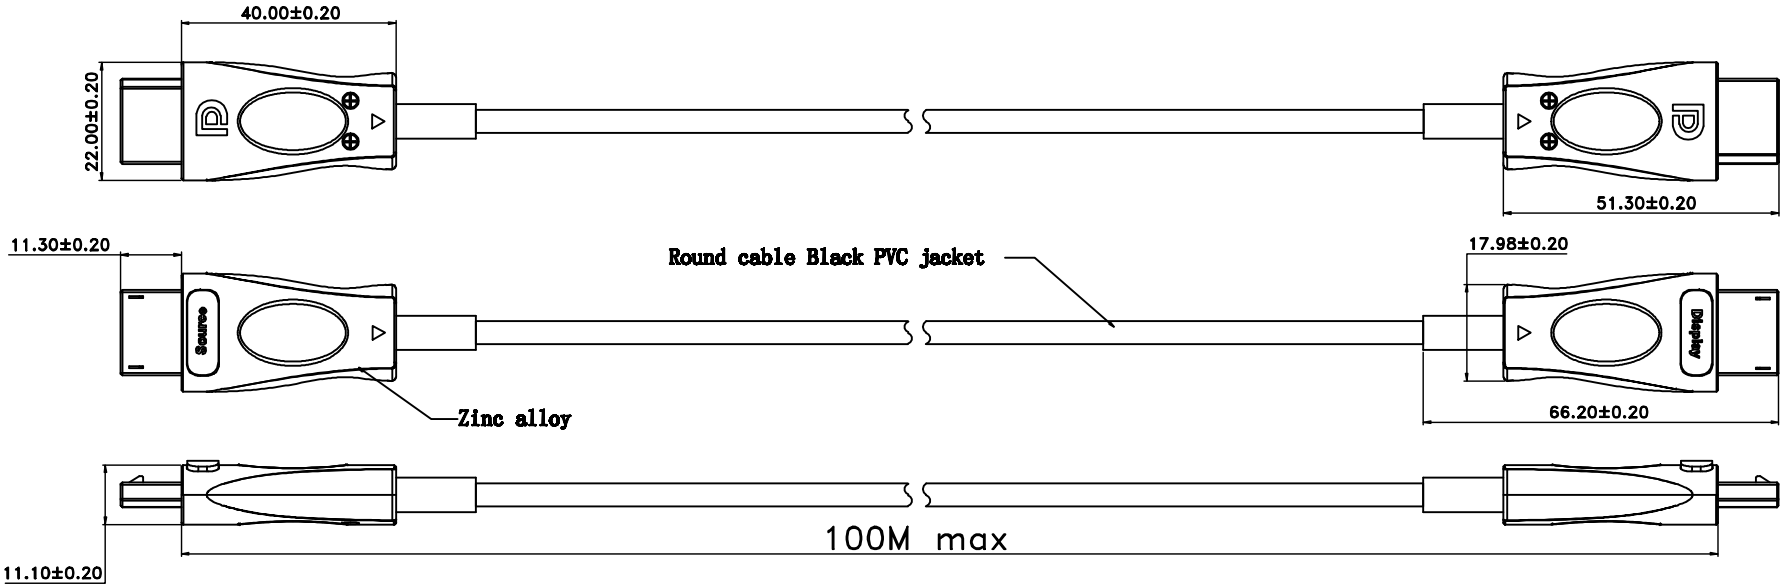

NOTE:

- Supports computer resolutions to 8K@60Hz 4K@120Hz 4:4:4
- Plug and Play
- Compatible with DP 1.4 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID inforamtion
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications:For Indoor use only;
- Operating temperature:-40℃ to 70℃
- Minimum bending radius 20mm
- Max. tension force:100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber(high speed data)and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing:package 1pc reel

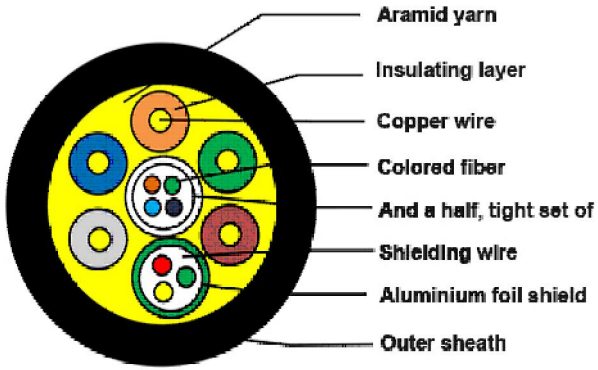

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.10
.XX	±2.0°	.XX	±0.05
.XXX	±1.0°	.XXX	±0.03

图号		日 期
制图	CLH	2019.05.10
审核		
核准		

品 名	DP 1.4 AOC			
产品编号				
单位	比例	页码	版本	
mm	1:1	1/1	1	

DIREKTRONIK
Dataprodukter utöver det vanliga