


LTE+WIFI Combination Antenna

Item 20119252



Dimensions

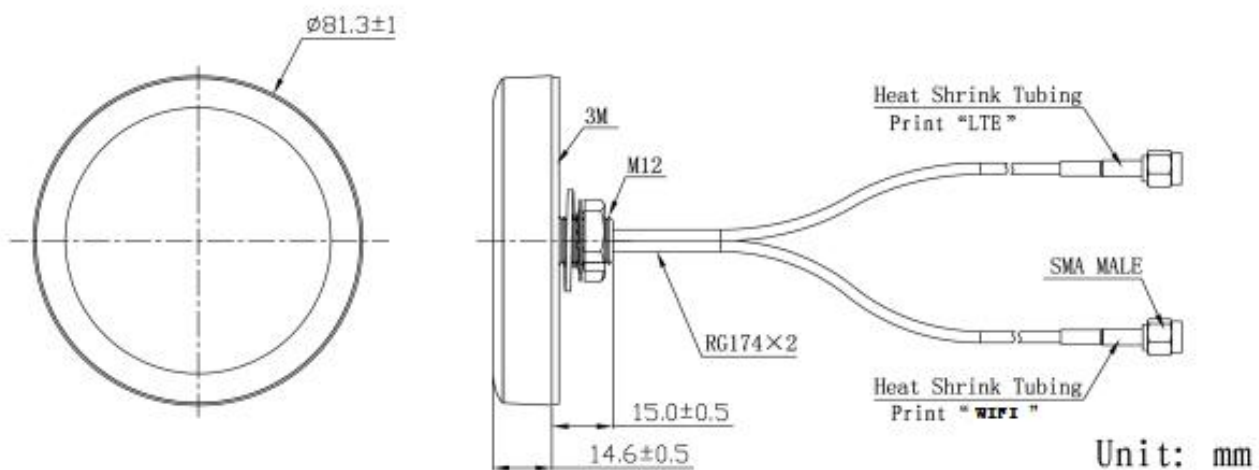

LTE+WIFI Combination Antenna




Specifications

Item		Specifications
LTE Antenna	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	<3.0
	Polarization	Linear
	Gain	2.5dBi（Zenith）
	Impedance	50Ω
WIFI Antenna	Frequency Range	2400~2483.5MHz/4900~5825MHz
	V.S.W.R	<2.0
	Polarization	Linear
	Gain	3.0dBi（Zenith）
	Impedance	50Ω
Mechanical	Cable	RG174
	Connector	SMA or others
	Material	ABS
	Mounting Method	Screw
Environmental	Operating Temperature	-40℃~+85℃
	Relative Humidity	Up to 95%
	Ingress Protection	IP67(exclude cable outlet)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

LTE+WIFI Combination Antenna

Radiation Pattern







LTE Antenna

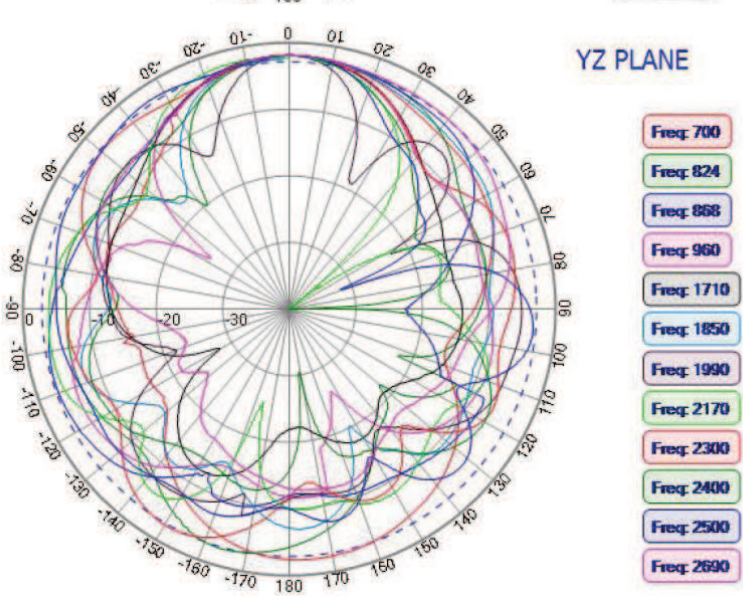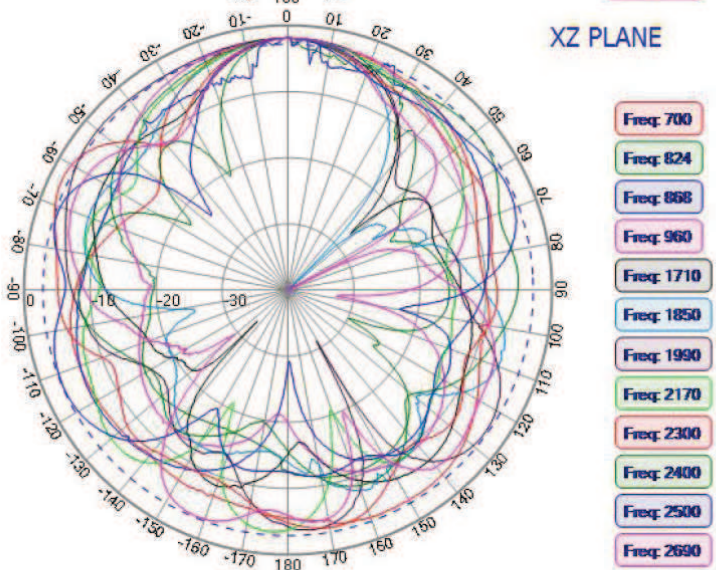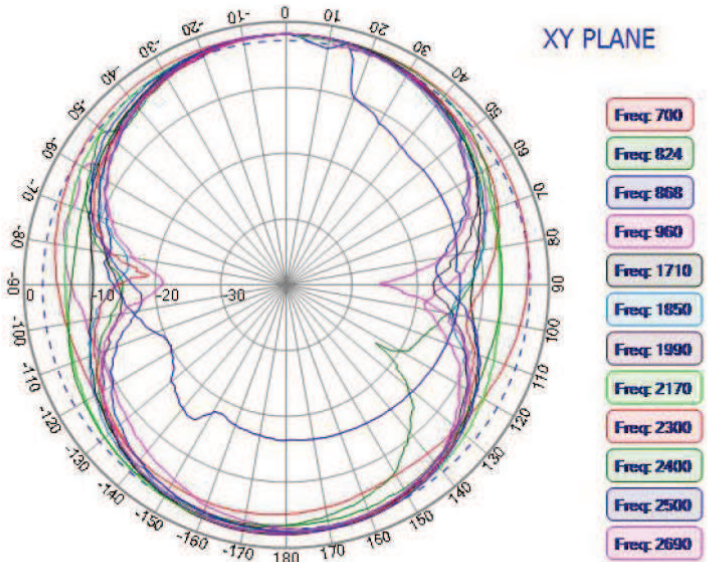

LTE+WIFI Combination Antenna

Radiation Pattern

WIFI Antenna

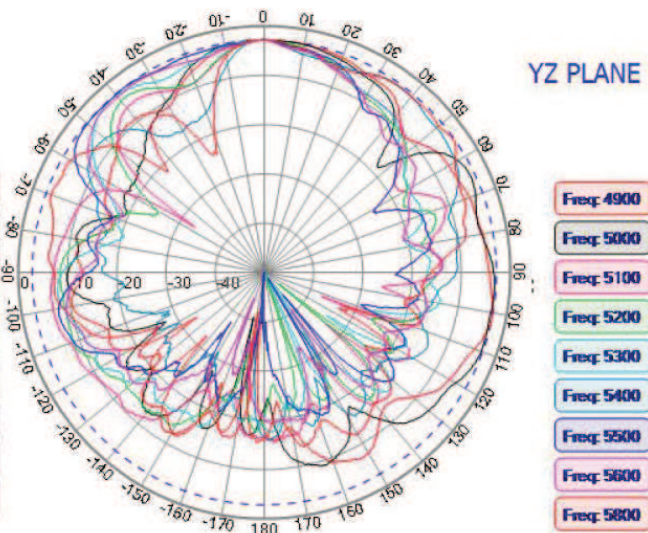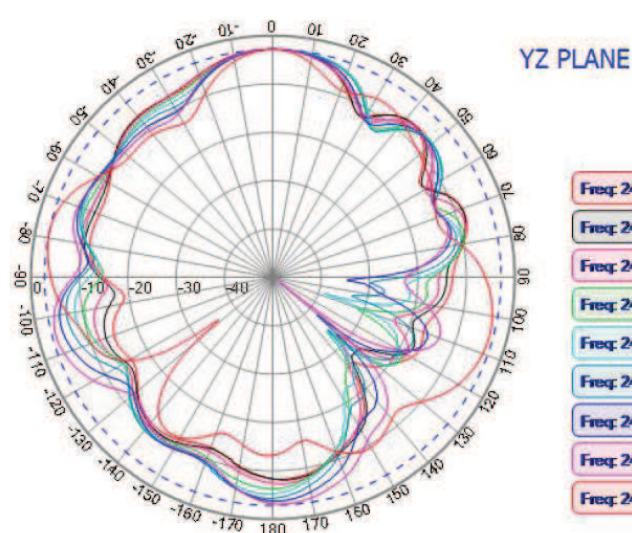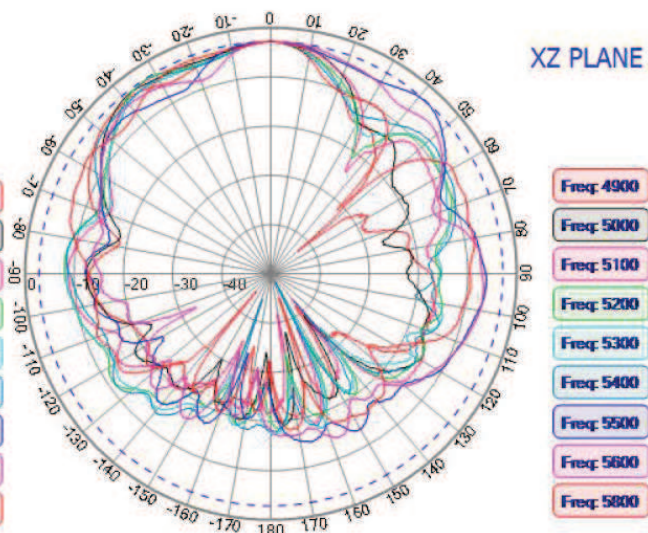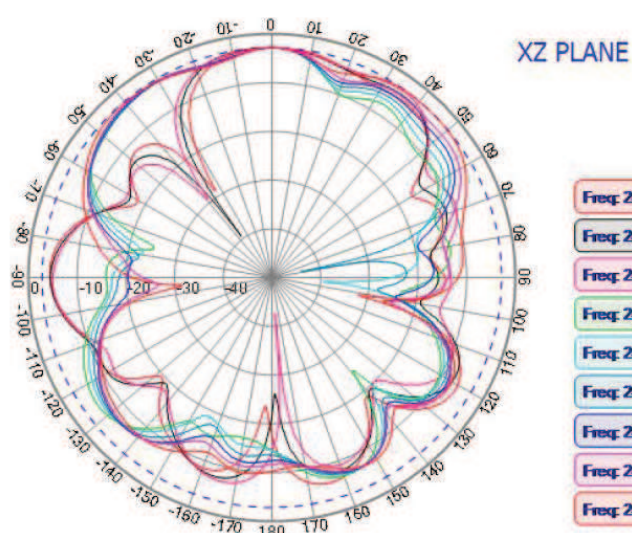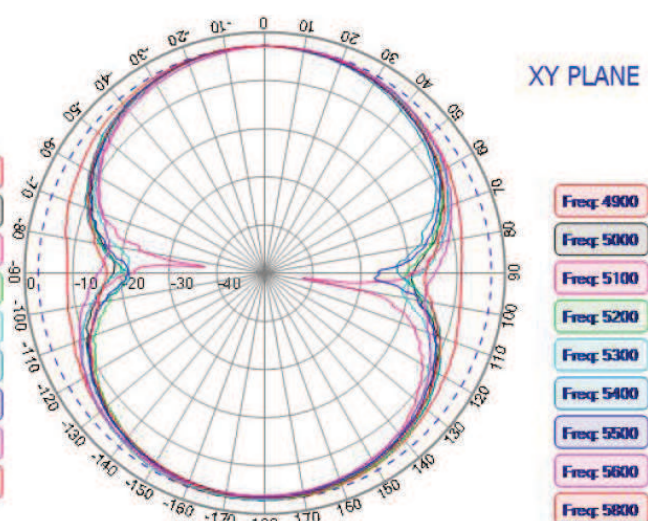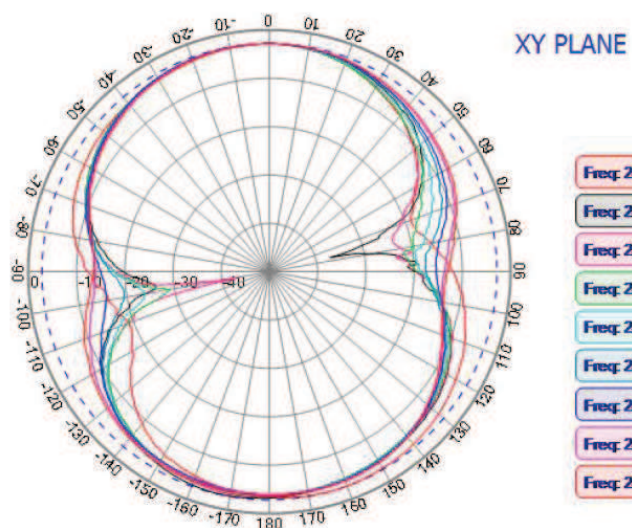

SE



NO

Direktronik AB | Box 234, 149 23 Nynäshamn | Besöksadress Konsul Johnsons väg 15 149 45 Nynäshamn

Telefon 08 52 400 700 | Fax | Epost info@direktronik.se | Org.nr 556281-9663 | Bankgiro 922-0179