

## BAREBONE XPC slim XH610

### AFFORDABLE 3.5-LITRE PC FOR DEMANDING TASKS

The Shuttle XPC slim Barebone XH610 is a real roomster considering its small footprint - one optical drive, two 2.5" storage drives and an M.2 SSD card can be installed into the robust steel chassis. In addition, it supports the powerful desktop processors with socket LGA1700 \*). The built-in heatpipe cooling ensures the system runs quietly at maximum stability. Thanks to its great connectivity it meets the requirements of many applications that extends from office PC up to industrial applications. The system supports two digital displays with Ultra HD resolution, one VGA display, dual LAN (2.5G + 1G), four USB 3.2 Gen 1 and four USB 2.0 ports and up to five serial ports. With this high level of efficiency and flexibility - who needs a bulky tower PC anyway?



Note: the optical drive is not included.



For 12/13<sup>th</sup> Gen.  
INTEL CORE CPU



HDMI 2.0b



DP 1.4a



DUAL LAN  
2.5G + 1G



2x 32 GB  
SUPPORT



NVMe SSD  
SUPPORT



2x BAYS FOR  
2.5" HDD/SSD



UP TO 5  
COM PORTS



HEATPIPE  
COOLING



ALWAYS-ON-  
JUMPER



MAX.  
50 °C



24/7  
SUPPORT

### SLIM DESIGN

- Robust black steel chassis with open front (without I/O covers)
- Dimensions: 23.8 x 20 x 7.25 cm (LWH), ca. 3.5-litre
- Supports 24/7 Nonstop Operation
- Operating temperature: 0~50 °C (non-condensing)
- Mini-ITX Mainboard (17 x 17 cm)
- Hole for Kensington Lock

### OPERATING SYSTEM

- An operating system is not included
- Supports Windows 10/11 and Linux (64-bit)

### PROCESSOR SUPPORT \*)

- Socket LGA1700 supports 12<sup>th</sup>/13<sup>th</sup>/14<sup>th</sup>-gen Intel Core i9/i7/i5/i3, Pentium Gold und Celeron processors (Alder Lake-S/Raptor Lake-S), 10 nm, max. 65W TDP
- Includes heatpipe cooling system with two fans

### CHIPSET

- Intel H610 Chipset

### MEMORY SUPPORT

- 2x 260-pin SO-DIMM slot
- Supports DDR4-3200/2666/2400
- max. 2x 32 GB

### STORAGE BAYS AND M.2 SLOTS

- 1x 5.25" bay for optical slimline drive (SATA, 12.7 mm height)
- 2x 2.5" bay for SATA hard disk or SSD, max. 9.5 and 12.5 mm
- 1x M.2-2280M slot for M.2 SSDs with PCIe x4 NVMe or SATA
- 1x M.2-2230E slot supports an optional M.2 WLAN card

### CONNECTORS

- HDMI 2.0b
- DisplayPort 1.4a
- D-Sub VGA
- 4x USB 3.2 Gen1 (1x Type-C)
- 4x USB 2.0
- 2x COM (1x RS232 and 1x RS232/422/485)
- 5x audio ports (3.5 mm)
- Dual Gigabit LAN (2.5G and 1G)
- Connector for external power button
- "Always-On" jumper
- DC input

### POWER SUPPLY

- External 120 W / 19 V power adapter (DC input supports 12V and 19V)

### OPTIONAL ACCESSORIES

- WLAN Modul (WLN-M (ac)/WLN-M1 (ax))
- LTE accessory (WWN03)
- Vertical Stand (PS01)
- VESA mount (PV02)
- 3.5" HDD Rack
- Cable for external power button (CXP01)
- Triple RS232 COM port (PCM31)



### Comparison of product versions:

**XH610** with open front



**XH610V** with front doors



### \*) Important note:

for Intel Core processors of the generation 13 and 14 (Raptor Lake-S [Refresh]) a BIOS update might be necessary, that need to be performed with a compatible processor.  
Generation 13 is supported since BIOS version 203 (available since March'23 and Generation 14 is supported since BIOS version 206 (available since Jan'24).

## PRODUCT FEATURES



### A clean and modern look

Shuttle has always placed great emphasis on the interior and exterior aesthetics of their Mini-PCs with the belief that a good blend of style and form factor allow the Mini-PC to be attractive, versatile and work well in almost any environment. And the Shuttle XPC slim Barebone XH610 was designed just like that and shines in a clean and modern appearance. This tiny tot barely stands 7.3 cm in height with a volume of 3.5 litres.



### Low noise thanks to heatpipe cooling system

An active dual-fan heatpipe cooling system ensures whisper-quiet operation and system stability.



### Supports extended temperature range and 24/7 operation

The Shuttle XPC slim Barebone XH610 is officially approved for 24/7 permanent operation. Thanks to its efficient cooling, this PC runs highly reliably making it perfectly suitable for digital signage and POI/POS applications - even at ambient temperatures of up to 50 °C (non-condensing).

**Caution:** For high ambient temperatures over 40 °C we strongly recommend to use SSDs.



### Supports Socket LGA1700

#### Intel® Core™ processors \*)

"Alder Lake-S" / "Raptor Lake-S (Refresh)" is the codename for Intel's 12<sup>th</sup>/13<sup>th</sup>/14<sup>th</sup> Generation of Intel® Core™ Desktop Processors for socket LGA1700 introduced along with the 600/700-Series chipsets. The 12000/13000/14000 series processors feature a new hybrid design combining a number of performance cores (P-cores) and efficiency cores (E-cores). Get the performance you need, where you need it - whether you're a gamer, creator, streamer, or everyday user.

\*) BIOS-Update might be required to support Gen13/14 processors

### Dual 4K Display support + VGA

The XH610 features two digital video outputs: HDMI 2.0b and DisplayPorts (DP 1.4) which both can run at 4K (3840 x 2160 / 2160p) high resolution at 60 Hz frames per second. Furthermore, the XH610 has an D-Sub/VGA port. The PC supports a maximum of three displays.



### One M.2-Slot for SSD cards

The M.2-2280 slot supports one M.2 SSD storage card with NVMe/PCIe or SATA interface. Type 2280 means, it supports the usual M.2 cards with a width of 22 mm and a length of 80 mm, but also 2242 and 2260 standard cards are supported.



### Flexible options for drives

XH610 offers the following options for the installation of SATA drives:


- (1) one optical slimline drive and up to two 2.5" drives
- (2) up to three 2.5" drives
- (3) one large 3.5" hard drive

Note: some configurations require additional accessories that are not supplied.



### Dual Network (Intel 1G + 2.5G)

The Shuttle XPC slim Barebone XH610 supports Dual LAN with Intel network adapters, which are popular for their excellent performance and driver compatibility and are the preferred choice for professional environments. One LAN port even supports up to 2.5Gbps over your existing Cat5e or better cabling. With XH610 you can expand your network's bandwidth and reduce digital bottlenecks.



### Power on after Power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status (3) keep system turned off (4) Power-On by LAN or (5) Power-On by Real-Time-Clock. As a matter of the nature of this function, it may fail after short power failures. This is why the XH610 also comes with a hardware-based solution. By removing Jumper JP4 the system will start unconditionally once power is applied.

### External power button by separate remote line

If, because of space constraints (e.g. in case of fixed installation), the machine cannot be switched on by pressing the front power button, it can be powered on by a separate remote line. You will find an appropriate four-pin connector at the back panel of the XH610 (pitch 2.54 mm). Furthermore, this connector provides a Clear CMOS function and +5V DC voltage supply for external devices.

+5V voltage (2) (4) Power Button  
Clear CMOS (1) (3) Ground



## REQUIRED COMPONENTS

The following components need to be added to make it a fully-configured Mini PC

### Shuttle XPC slim Barebone XH610



#### LGA1700 Processor

Intel Core Gen 12/13/14 \*) Code name "Alder Lake-S"/"Raptor Lake-S (Refresh)"  
Core i9 / i7 / i5 / i3, Pentium Gold or Celeron  
TDP max. 65 W

\*) a BIOS-Update might be required to support Gen13/14 processors



#### Memory Modules

Up to two DDR4-3200/2666/2400  
SO-DIMM memory modules  
max. 32 GB each



#### M.2 SSD

M.2-2280/2260/2242  
SSD storage (SATA or PCIe/NVMe)

Optical Drive



Two bays for  
2.5" HDD/SSD




#### Optical Drive

5.25" Slimline form factor, height: 12.7 mm  
with SATA connector



#### One or two 2.5" Storage Drives

SATA hard disk and/or Solid State Disk (SSD)  
Max. height: 12.5 mm and 9.5 mm  
Note: instead of the optical drive, a third 2.5" drive can also be installed. A SATA cable for the second/third device is not included.



#### Operating System

Windows 10/11 or Linux (64-bit only)

## OPTIONAL ACCESSORIES FROM SHUTTLE



#### WLAN-Accessory

**WLN-M** (802.11ac / Wifi 5)  
**WLN-M1** (802.11ax / Wifi 6)  
M.2-2230 card supports WLAN  
and BT - including 2 antennas



#### 3.5" HDD Rack **PHD4**

Allows for installation of one  
3.5" hard drive. However doing  
so means no other drives can  
be installed, except M.2 SSD.



#### LTE Adapter Kit **WWN03**

allows the installation of an  
M.2 LTE card and nano SIM  
card (occupies the 2.5" bay)



#### Triple COM-Port **PCM31**

Adds three additional RS232  
COM ports to the front (occu-  
pies the ODD bay)



#### Vertical Stand **PS01**

for the vertical operation



#### Cable **CXP01**

Cable for external push button  
switch (without button)



#### Vesa Mount **PV02**

75x75 / 100x100 mm VESA  
mount



## Front and Back Panel and Mainboard


Front panel



Back panel





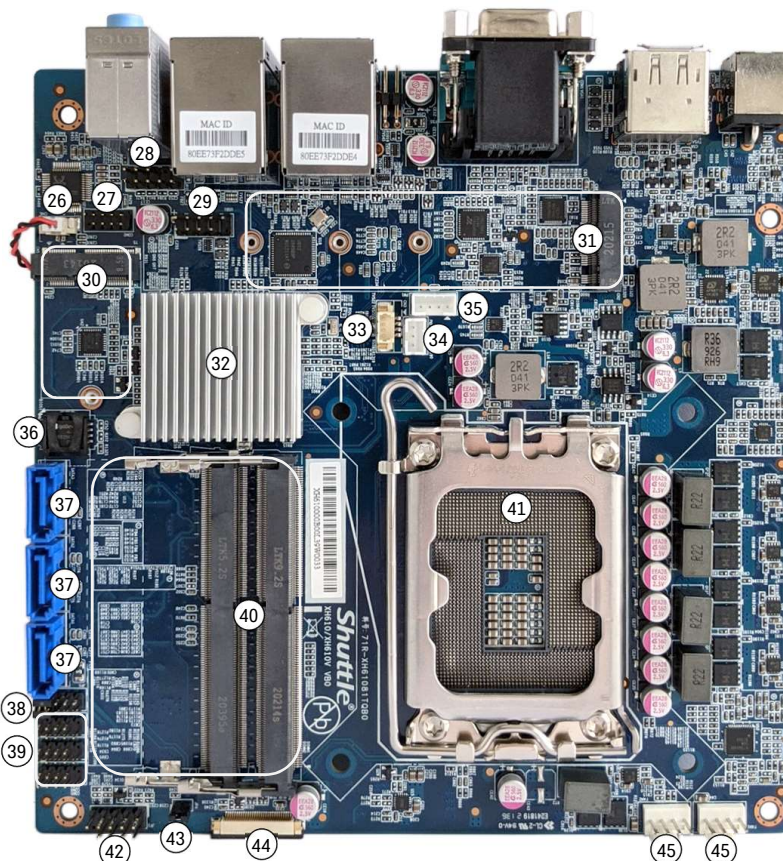



Mainboard



1. 5.25" bay for optical slimline drive
2. 2x USB 2.0
3. USB 3.2 Gen 1 Type-A
4. Microphone input
5. Headphones output
6. USB 3.2 Gen 1 Type-C
7. Power button with Power LED indicator
8. LED indicator for storage activity
9. 2x Thumbscrew
10. 2x Perforation for optional WLAN antenna
11. Hole for Kensington Lock
12. DC-in connector for power adapter
13. DisplayPort 1.4a
14. HDMI 2.0b port
15. D-Sub VGA port
16. RS232/422/485 COM port
17. 4-pin connector (2.54 mm pitch) for external power button, Clear CMOS button and 5V DC voltage
18. Gigabit LAN port (RJ45)
19. 2.5G LAN port (RJ45)
20. 2x USB 3.2 Gen 1 port
21. 2x USB 2.0 port
22. Audio Line-in port
23. Audio Line-out port
24. Audio Microphone input
25. RS232 COM port
26. Connector for CMOS battery
27. Onboard RS232 COM port
28. Audio connectors for front panel
29. 2x5-pin onboard connector for 2x USB 2.0
30. M.2-2230E slot for optional WLAN module
31. M.2-2280M slot for SSD module
32. Intel H610 chipset
33. 4-pin onboard connector for USB 2.0
34. 12V power connector for SATA drive
35. 5V power connector for SATA drive
36. Flash memory for BIOS/Firmware
37. 3x SATA connectors
38. Jumper for COM port voltage setting
39. 3x RS232 header for COM ports on the front panel (optional accessory Shuttle PCM31)
40. 2x SO-DIMM sockets for DDR4 memory
41. CPU socket for LGA1700 processors
42. Connector for front panel buttons and LEDs
43. Jumper JP4 for "Always on" function
44. USB 3.0 header for front panel ports
45. 2x fan connectors (4-pin)

## Shuttle Product Comparison: XH310R(V) versus XH610(V)

MODEL	XH310R / XH310RV	XH610 / XH610V
Processor Support	8 <sup>th</sup> / 9 <sup>th</sup> Gen. Intel Core Processors "Coffee Lake-S" Socket LGA1151v2, TDP max. 65W	12/13/14 <sup>th</sup> Gen. Intel Core Processors "Alder Lake-S" / "Raptor Lake-S (Refr)" Socket LGA1700, TDP max. 65W
OS Support	Windows 10 & Linux – 64-bit	Windows 10 & Linux – 64-bit
Chipset	Intel H310 Supports Dual Display	Intel H610 Supports Triple Display
Memory (max.)	2x 32 GB DDR4-2666/2400 SO-DIMM (260 pins)	2x 32 GB DDR4-3200/2666/2400 SO-DIMM (260 pins)
Drive Bays	1x 5.25" Slimline ODD bay (12.7 mm) 2x 2.5" bay (12.5 & 9.5 mm) 1x M.2-2280 SSD slot (PCIe X4, SATA)	1x 5.25" Slimline ODD bay (12.7 mm) 2x 2.5" bay (12.5 & 9.5 mm) 1x M.2-2280 SSD slot (PCIe X4, SATA)
Front Panel Ports	2x USB 3.2 Gen 1 2x USB 2.0 2x Audio Power-Button Power-LED, HDD-LED	2x USB 3.2 Gen 1 (1x Type-C) 2x USB 2.0 2x Audio Power-Button Power-LED, HDD-LED
Back Panel Ports	HDMI 2.0a DisplayPort 1.2 D-Sub/VGA 2x USB 3.2 Gen 1 2x USB 2.0 2x Gigabit LAN (Intel i211) 2x COM RS232 (1x RS422/485) DC input (supports 12V and 19V) 4-pin header for ext. power button	HDMI 2.0b DisplayPort 1.4 D-Sub/VGA 2x USB 3.2 Gen 1 2x USB 2.0 Gigabit LAN (Intel i219) 2.5G LAN (Intel i225 or i226) 2x COM RS232 (1x RS422/485) DC input (supports 12V and 19V) 4-pin header for ext. power button
Power Adapter	90 W / 19 V	120 W / 19 V
Optional Accessories	Vertical stand (PS01) VESA mount (PV02) Power Button cable (CXP01) Triple COM (PCM31) for XH610 Slimline bay cover (MY01) for XH610V 3.5" HDD rack (PHD4) WLAN kit (WLN-M / WLN-M1)	Vertical stand (PS01) VESA mount (PV02) Power Button cable (CXP01) Triple COM (PCM31) for XH610 Slimline bay cover (MY01) for XH610V 3.5" HDD rack (PHD4) WLAN kit (WLN-M / WLN-M1) LTE kit (WWN03)
Chassis Dimensions	24 x 20 x 7.25 cm (ca. 3.5 L)	24 x 20 x 7.25 cm (ca. 3.5 L)
Front View (open front)	XH310R – open front 	XH610 – open front 
Front View (with front doors)	XH310RV – with front doors 	XH610V – with front doors 
Back View		

### \*) Important note for XH610(V):

for Intel Core processors of the generation 13 and 14 (Raptor Lake-S [Refresh]) a BIOS update might be necessary, that need to be performed with a compatible processor. Generation 13 is supported since BIOS version 203 (available since March'23 and Generation 14 is supported since BIOS version 206 (available since Jan'24).

## SHUTTLE XPC SLIM BAREBONE XH610 — SPECIFICATIONS

CHASSIS	<p>Slim 3.5-litre chassis, colour: black</p> <p>Dimensions: 238 x 200 x 72.5 mm (LWH without rubber feet) = ca. 3.5-litre</p> <p>Height including rubber feet: 73.3 mm</p> <p>Weight: 2.2 kg net, 3.5 kg gross</p> <p>Open front - without covers for optical drive and front panel connectors</p> <p>Hole for Kensington Lock at the backpanel</p> <p>Operation position horizontal or even vertical with the optional stand PS01</p>
POWER ADAPTER	<p>External 120 W power adapter (fanless)</p> <p>Input: 100~240 V AC, 50/60 Hz</p> <p>Output: 19 V DC, max. 6.32 A, max. 120 W output wattage</p> <p>DC Connector: 5.5 / 2.5mm (outer/inner diameter)</p> <p>AC mains cable: 3 pins, ca. 1.8 m length, with C5/C6 coupler (called "Mickey Mouse" or "Clover-leaf") for the power adapter and CEE-7/7 plug with earth-contact (type E+F) for the power outlet</p> <p>Remark: the DC-input of the computer supports an external power source with either 12V±5% or 19V±5%.</p>
OPERATING SYSTEM	<p>This system comes without operating system.</p> <p>It is compatible with Windows 10/11 and Linux (64-bit)</p>
PROCESSOR SUPPORT	<p>Processor Socket LGA1700</p> <p>Supports Intel Core i9 / i7 / i5 / i3, Pentium Gold and Celeron processors</p> <p>Supports the following generations of Intel Core processors:</p> <ul style="list-style-type: none"><li>- Gen 12 "Alder Lake-S"</li><li>- Gen 13 "Raptor Lake-S" since BIOS-Version 203 available since Mar'23 *)</li><li>- Gen 14 "Raptor Lake-S Refresh" since BIOS-Version 206 available since Jan'24 *)</li></ul> <p>Supports processors with integrated graphics only [5]</p> <p>Maximum supported processor power consumption (TDP) = 65 W</p> <p>Does not support the unlock-function of Intel K-Series processors.</p> <p>The processor integrates PCI-Express, memory controller and the graphics engine on the same die.</p> <p>(Performance features depend on processor type)</p> <p>* <b>Attention:</b> in case an BIOS update is required, the PC must first be started with a compatible processor.</p> <p>Download-Website: <a href="https://global.shuttle.com/support/download">https://global.shuttle.com/support/download</a>.</p>
PROCESSOR COOLING	<p>Processor cooling with heat-pipe technology and two fans (6cm)</p>
MAINBOARD, CHIPSET, BIOS	<p>Mainboard in Mini-ITX form factor 17 x 17 cm</p> <p>Chipset: Intel® H610</p> <p>AMI BIOS in 32 MB EEPROM</p> <p>All capacitors are high quality solid capacitors</p> <p>Supports hardware monitoring and Watchdog functionality</p> <p>Supports Unified Extensible Firmware Interface (UEFI)</p> <p>Supports power on after power failure [1]</p> <p>Supports Firmware TPM v2.0 (fTPM)</p>
MEMORY SUPPORT	<p>2x SO-DIMM slot with 260 pins</p> <p>Supports DDR4-3200/2933/2666/2400/2133 (PC4-25600/23466/21300/19200/17000) SDRAM at 1.2 V</p> <p>Supports Dual Channel mode</p> <p>Supports a maximum of 32 GB per DIMM, maximum total size: 64 GB</p> <p>Supports two unbuffered DIMM modules (no ECC or registered)</p>
INTEGRATED GRAPHICS	<p>The features of the integrated Intel UHD graphics function depend on the processor type used [5].</p> <p>The PC features three video outputs:</p> <ul style="list-style-type: none"><li>- 1x HDMI v2.0b (supports 1080p/60 and 2160p/60)</li><li>- 1x DisplayPort v1.4a (supports 1080p/60 and 2160p/60)</li><li>- 1x Analog VGA (15-pin D-Sub, supports 1080p/60)</li></ul> <p>Supports three independent displays simultaneously with the integrated graphics function.</p> <p>Hardware video decoding/encoding: H.264, H. 265 (8- and 10-bit, encoding via QuickSync), VP9 (10-bit VP9 can only be decoded)</p>
AUDIO	<p>Audio Realtek® ALC 897/662/888 High-Definition Audio</p> <p>Three analog audio connectors (3.5mm) at the backpanel:</p> <ol style="list-style-type: none"><li>1) Front line-out (head-phones)</li><li>2) Rear Surround line-out (shared with microphone input)</li><li>3) Center line-out (shared with line-in)</li></ol> <p>Digital multi-channel audio output: by HDMI and DisplayPort</p>

DUAL LAN	<p>Dual network with two RJ45 ports with two status LEDs each</p> <ul style="list-style-type: none"> <li>- yellow LED: lights up when data transfer is active</li> <li>- green LED for speed mode: off at 10 Mbps, lights up when 10 Mbit or higher</li> </ul> <p>Used network chips:</p> <ol style="list-style-type: none"> <li>1) Intel i225 or i226 supports 100 / 1.000 / 2.500 Mbps data transfer rate</li> <li>2) Intel 219LM supports 10 / 100 / 1.000 Mbps data transfer rate</li> </ol> <p>PCIe interface</p> <p>Supports WAKE ON LAN (WOL)</p> <p>Supports network boot by Preboot eXecution Environment (PXE)</p>
M.2-2280M SSD SLOT	<p>The M.2 2280M slot provides the following interfaces:</p> <ul style="list-style-type: none"> <li>- PCI-Express Gen. 3.0 X4, supports NVMe</li> <li>- SATA v3.0 (max. 6 Gbps)</li> </ul> <p>It supports M.2 cards with a width of 22 mm and a length of 42, 60 or 80 mm (type 2242, 2260, 2280).</p> <p>Supports M.2 SSDs with SATA or PCI-Express interface</p>
M.2-2230E SLOT FOR WLAN CARDS	<p>Interfaces: PCI-Express Gen. 2.0 X1 und USB 2.0</p> <p>Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230)</p> <p>Supports WLAN expansion cards</p> <p>Optional Shuttle accessory: WLN-M / WLN-M1 <b>[4]</b></p>
SATA CONNECTORS	<p>3x Serial-ATA connector, max. 6 Gbps</p> <p>Supports NCQ and AHCI</p>
STORAGE BAYS	<p>This system features three drive bays:</p> <ol style="list-style-type: none"> <li>1) supports one optical drive (ODD) in 5.25" slimline format with 12.7 mm height - this bay can alternatively be used for a 2.5" drive</li> <li>2) upper 2.5" bay supports one 2.5" drive with max. 12.5 mm height</li> <li>3) lower 2.5" bay supports one 2.5" drive with max. 9.5 mm height</li> </ol> <p>The system includes the following pre-installed cables:</p> <ul style="list-style-type: none"> <li>- 2x Power cable for 2.5" drives (5 Volt <b>[6]</b>)</li> <li>- 1x SATA cable for one 2.5" drive</li> <li>- 1x combo connector (SATA and power) for an optical slimline drive (DVD or Blu-ray)</li> </ul> <p>Note: This system is ready for one 2.5" drive (SSD or hard disk) and one optical drive in slimline format to be installed.</p> <p>For further 2.5" drives, additional SATA cables are required. For a possible third 2.5" drive also four screws M3x4 are required.</p> <p>The optional accessory PHD4 allows the installation of a 3.5" hard disk <b>[8]</b>.</p>
FRONT PANEL CONNECTORS	<p>Microphone input</p> <p>Audio Line-out (headphones)</p> <p>1x USB 3.2 Gen 1 Type A ( max. 5 Gbps, blue)</p> <p>1x USB 3.2 Gen 1 Type C ( max. 5 Gbps)</p> <p>2x USB 2.0 (black)</p> <p>Power button</p> <p>Power LED (blue)</p> <p>HDD LED (yellow)</p>
BACK PANEL CONNECTORS	<p>1x DisplayPort 1.4a audio/video output <b>[2]</b></p> <p>1x HDMI 2.0b audio/video output</p> <p>1x Analog VGA video output (15-pin D-Sub)</p> <p>2x USB 3.2 Gen 1 Type A (max. 5 Gbps, blue)</p> <p>2x USB 2.0 (black)</p> <p>2x RJ45 LAN (1 Gbps and 2.5 Gbps)</p> <p>1x COM (RS232) - on the right side</p> <p>1x COM (RS232/422/485) - middle/down</p> <p>3x Audio 3.5mm (Line-in, Line-out, Mic-in)</p> <p>1x DC-input connector for external power adapter (supports 12V±5% or 19V±5%)</p> <p>1x 4-pin connector (2.54 mm pitch) supports:</p> <ul style="list-style-type: none"> <li>- external power on button (see optional accessory CXP01)</li> <li>- Clear CMOS function</li> <li>- +5V DC voltage for external components</li> </ul> <p>2x Perforation for Wireless LAN antennas</p> <p>1x Hole for Kensington Lock</p>



OTHER ONBOARD CONNECTORS	<p>Jumper J4 for power-on-after-power-fail (hardware solution) <b>[1]</b></p> <p>Front connectors for power button, LEDs, USBs, audio ports</p> <p>USB 2.0 headers (4-pin)</p> <p>4x RS232 COM port (2x5-pin header, 2 mm pitch) - 1x occupied</p> <p>Two 4-pin fan connectors (one occupied by the CPU cooling system)</p> <p>SATA power connectors: 5V (4-pin, occupied) and 12V (3-pin)</p>
SUPPLIED ACCESSORIES	<p>Multi-language installation guide (EN, DE, FR, ES, JP, KR, SC, TC)</p> <p>DVD with Windows driver software and manuals in PDF format</p> <p>Pre-installed SATA and power cables for one 2.5" drive and one slimline drive</p> <p>External power adapter with ca. 1.8m AC power cord (with protective-earth contacts)</p> <p>Protector cap for the CPU socket (do not use if heat-pipe or fan is mounted)</p> <p>CPU heatpipe cooling system pre-installed with heatsink compound</p> <p>2 screws (M3x5, silver) for installation of two M.2 cards</p> <p>8 screws (M3x4, black) for installation of two 2.5" drives</p> <p>4 screws (M2x2.5, silver) for installation of an optional slimline drive</p>
OPTIONAL ACCESSORIES	<p><b>PS01:</b> Vertical stand</p> <p><b>PV02:</b> VESA mount</p> <p><b>WLN-M</b> (802.11ac, Wifi 5) or <b>WLN-M1</b> (802.11ax, Wifi 6): WLAN module <b>[4]</b></p> <p><b>PHD4:</b> 3.5" Hard Disk Rack <b>[8]</b></p> <p><b>CXP01:</b> adapter cable for external power button</p> <p><b>PCM31:</b> Adapter for three additional RS232 COM ports <b>[3]</b></p>
ENVIRONMENTAL SPECIFICATIONS	<p>Operating temperature range: 0~50°C <b>[7]</b></p> <p>Relative humidity range: 10~90% (non-condensing)</p>
CERTIFICATIONS / COMPLIANCE	<p>EMI: CE, UKCA, FCC, BSMI, RCM, VCCI</p> <p>Safety: CB 60950/62368, cTUVus, BSMI</p> <p>Other: RoHS, Energy Star, ErP</p> <p>This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives:</p> <p>(1) 2004/108/EC relating to electromagnetic compatibility (EMC),</p> <p>(2) 2006/95/EC relating to Electrical Equipment designed for use within certain voltage limits (LVD),</p> <p>(3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP)</p>

## [1] Power-on-after-power-fail:

The BIOS setup provides a "power-on-after-power-fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status or (3) keep system turned off. As a matter of the nature of this function, it may fail after short power failures. This is why this PC also comes with a hardware-based solution. By removing the appropriate jumper JP4, the system will start unconditionally once power is supplied.

## [2] How to convert DisplayPort into HDMI/DVI

The DisplayPort output supports Dual-mode (DP++) and can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either DisplayPort (without an adapter) or HDMI/DVI (with an adapter). Please note that DVI/HDMI monitors are only operated in single-link mode, i.e. max. 1920x1200 with 60 Hz. However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter.

## [3] Optional COM port accessory PCM31

This accessory provides three additional COM ports to the front panel which means the upper bay can no longer be used for an optical drive.

## [4] Optional Wireless LAN module:

This slim PC can optionally be upgraded with WLAN/Bluetooth functionality. Shuttle offers the suitable accessory kits "WLN-M" and "WLN-M1", consisting of a WLAN card in M.2-2230 format and two external antennas with appropriate antenna cables.

## [5] Intel processors without integrated graphics (ID ends with "F", e.g. Core i7-12700F) are not compatible.

## [6] 12V Power connector for SATA drives

The supplied power cables for SATA drives provide a voltage of 5V. Only in very exceptional cases a 2.5" hard disk also requires a 12V line, which is not supported out-of-the-box (only via an optional adapter, included by PHD4).

## [7] High ambient temperature

For high ambient temperature over 40°C we strongly recommend to use SSDs instead of hard disk drives.

## [8] The optional accessory PHD4 allows for installation of one 3.5" hard drive. However doing so means no other drives such as a slimline DVD drive or a 2.5" HDD/SSD can be used.



12<sup>TH</sup> GENERATION INTEL CORE DESKTOP PROCESSOR FAMILY

Socket LGA1700 10 nm "Alder Lake S" processor overview (Date: January 2022)

Processors with a **TDP of more than 65W** and **processors without graphics function (ID ends with "F")** are not supported (marked in red).

PROCESSOR	MODEL	P-CORES/ THREADS	P-CORES CLOCK/Turbo	E-CORES	E-CORES CLOCK/Turbo	SMART CACHE	BASE TDP	MEMORY SUPPORT	GRAPHICS ENGINE (MAX. CLOCK)
Core™ i9	<b>12900K</b>	8 / 16	3.2 – 5.1 GHz	8	2.4 – 3.9 GHz	30 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.55 GHz)
	<b>12900KF</b>	8 / 16	3.2 – 5.1 GHz	8	2.4 – 3.9 GHz	30 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>12900</b>	8 / 16	2.4 – 5.0 GHz	8	1.8 – 3.8 GHz	30 MB	65 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>12900F</b>	8 / 16	2.4 – 5.0 GHz	8	1.8 – 3.8 GHz	30 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>12900T</b>	8 / 16	1.4 – 4.8 GHz	8	1.0 – 3.6 GHz	30 MB	35 W	DDR4-3200	UHD 770 (1.55 GHz)
Core™ i7	<b>12700K</b>	8 / 16	3.6 – 4.9 GHz	4	2.7 – 3.8 GHz	25 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.50 GHz)
	<b>12700KF</b>	8 / 16	3.6 – 4.9 GHz	4	2.7 – 3.8 GHz	25 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>12700</b>	8 / 16	2.1 – 4.9 GHz	4	1.6 – 3.6 GHz	25 MB	65 W	DDR4-3200	UHD 770 (1.50 GHz)
	<b>12700F</b>	8 / 16	2.1 – 4.9 GHz	4	1.6 – 3.6 GHz	25 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>12700T</b>	8 / 16	1.4 – 4.6 GHz	4	1.0 – 3.4 GHz	25 MB	35 W	DDR4-3200	UHD 770 (1.50 GHz)
Core™ i5	<b>12600K</b>	6 / 12	3.7 – 4.9 GHz	4	2.8 – 3.6 GHz	20 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.45 GHz)
	<b>12600KF</b>	6 / 12	3.7 – 4.9 GHz	4	2.8 – 3.6 GHz	20 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>12600</b>	6 / 12	3.3 – 4.8 GHz	–	–	18 MB	65 W	DDR4-3200	UHD 770 (1.45 GHz)
	<b>12600T</b>	6 / 12	2.1 – 4.6 GHz	–	–	18 MB	35 W	DDR4-3200	UHD 770 (1.45 GHz)
	<b>12500</b>	6 / 12	3.0 – 4.6 GHz	–	–	18 MB	65 W	DDR4-3200	UHD 770 (1.45 GHz)
	<b>12500T</b>	6 / 12	2.0 – 4.4 GHz	–	–	18 MB	35 W	DDR4-3200	UHD 770 (1.45 GHz)
	<b>12400</b>	6 / 12	2.5 – 4.4 GHz	–	–	18 MB	65 W	DDR4-3200	UHD 730 (1.45 GHz)
	<b>12400F</b>	6 / 12	2.5 – 4.4 GHz	–	–	18 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>12400T</b>	6 / 12	1.8 – 4.2 GHz	–	–	18 MB	35 W	DDR4-3200	UHD 730 (1.45 GHz)
Core™ i3	<b>12300</b>	4 / 8	3.5 – 4.4 GHz	–	–	12 MB	60 W	DDR4-3200	UHD 730 (1.45 GHz)
	<b>12300T</b>	4 / 8	2.3 – 4.2 GHz	–	–	12 MB	35 W	DDR4-3200	UHD 730 (1.45 GHz)
	<b>12100</b>	4 / 8	3.3 – 4.3 GHz	–	–	12 MB	60 W	DDR4-3200	UHD 730 (1.45 GHz)
	<b>12100F</b>	4 / 8	3.3 – 4.3 GHz	–	–	12 MB	<b>58 W</b>	DDR4-3200	<b>None</b>
	<b>12100T</b>	4 / 8	2.2 – 4.1 GHz	–	–	12 MB	35 W	DDR4-3200	UHD 730 (1.40 GHz)
Pentium® Gold	<b>G7400</b>	2 / 4	3.7 GHz	–	–	6 MB	46 W	DDR4-3200	UHD 710 (1.35 GHz)
	<b>G7400T</b>	2 / 4	3.1 GHz	–	–	6 MB	35 W	DDR4-3200	UHD 710 (1.35 GHz)
Celeron®	<b>G6900</b>	2 / 2	3.4 GHz	–	–	4 MB	46 W	DDR4-3200	UHD 710 (1.30 GHz)
	<b>G6900T</b>	2 / 2	2.8 GHz	–	–	4 MB	35 W	DDR4-3200	UHD 710 (1.30 GHz)

**K** = unlocked, **T** = Power optimized lifestyle, **F** = without integrated graphics, **Base TDP** = Base Thermal Design Power (max. Base Power Consumption).Note: The Shuttle XPC slim Barebone XH610 does not support the Unlock-function of Intel K-Series processors.

P-Cores: Performance-Cores, E-Cores: Efficient-Cores

Core Clock: the listed core frequency ranges from Base Frequency to Turbo Frequency (Turbo Boost 3.0 Frequency is not mentioned here)

Base TDP: Processor Base Power dissipation that the processor is validated to not exceed at Base Frequency (Max. Turbo Power is not mentioned here)

Please refer to the support list for detailed processor support information at [global.shuttle.com](https://global.shuttle.com).

13<sup>TH</sup> GENERATION INTEL CORE DESKTOP PROCESSOR FAMILY

Socket LGA1700, Intel 7 / 10 nm, "Raptor Lake S" processor overview (Date: January 2023)

Processors with a **TDP of more than 65W** and **processors without graphics function (ID ends with "F")** are not supported (marked in red).

**Important note:** for Intel Core processors of the generation 13 ("Raptor Lake-S") and generation 14 ("Raptor Lake-S Refresh") a BIOS up-date might be necessary, that need to be performed with a compatible processor.

- Generation 13 is supported since BIOS version 203 (available since March'23 and

- Generation 14 is supported since BIOS version 206 (available since Jan'24).

Download-Website: <https://global.shuttle.com/support/download>.

PROCESSOR	MODEL	P-CORES/ THREADS	P-CORES CLOCK/Turbo	E-CORES	E-CORES CLOCK/Turbo	SMART CACHE	BASE TDP	MEMORY SUPPORT	GRAPHICS ENGINE (MAX. CLOCK)
Core™ i9	<b>13900KS</b>	8 / 16	3.2 – 6.0 GHz	16	2.4 – 4.3 GHz	36 MB	<b>150 W</b>	DDR4-3200	UHD 770 (1.65 GHz)
	<b>13900K</b>	8 / 16	3.0 – 5.8 GHz	16	2.0 – 4.3 GHz	36 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.65 GHz)
	<b>13900KF</b>	8 / 16	3.0 – 5.8 GHz	16	2.0 – 4.3 GHz	36 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>13900</b>	8 / 16	2.0 – 5.2 GHz	16	1.5 – 4.2 GHz	36 MB	65 W	DDR4-3200	UHD 770 (1.65 GHz)
	<b>13900F</b>	8 / 16	2.0 – 5.2 GHz	16	1.5 – 4.2 GHz	36 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>13900T</b>	8 / 16	1.1 – 5.1 GHz	16	0.8 – 3.9 GHz	36 MB	35 W	DDR4-3200	UHD 770 (1.65 GHz)
Core™ i7	<b>13700K</b>	8 / 16	3.4 – 5.4 GHz	8	2.5 – 4.2 GHz	30 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.60 GHz)
	<b>13700KF</b>	8 / 16	3.4 – 5.4 GHz	8	2.5 – 4.2 GHz	30 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>13700</b>	8 / 16	2.1 – 5.1 GHz	8	1.5 – 4.1 GHz	30 MB	65 W	DDR4-3200	UHD 770 (1.60 GHz)
	<b>13700F</b>	8 / 16	2.1 – 5.1 GHz	8	1.5 – 4.1 GHz	30 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>13700T</b>	8 / 16	1.4 – 4.8 GHz	8	1.0 – 3.6 GHz	30 MB	35 W	DDR4-3200	UHD 770 (1.60 GHz)
Core™ i5	<b>13600K</b>	6 / 12	3.5 – 5.1 GHz	8	2.6 – 3.9 GHz	20 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.50 GHz)
	<b>13600KF</b>	6 / 12	3.5 – 5.1 GHz	8	2.6 – 3.9 GHz	20 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>13600</b>	6 / 12	2.7 – 5.0 GHz	8	2.0 – 3.7 GHz	24 MB	65 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>13600T</b>	6 / 12	1.8 – 4.8 GHz	8	1.3 – 3.4 GHz	24 MB	35 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>13500</b>	6 / 12	2.5 – 4.8 GHz	8	1.8 – 3.5 GHz	24 MB	65 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>13500T</b>	6 / 12	1.6 – 4.6 GHz	8	1.2 – 3.2 GHz	24 MB	35 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>13400</b>	6 / 12	2.5 – 4.6 GHz	4	1.8 – 3.3 GHz	20 MB	65 W	DDR4-3200	UHD 730 (1.55 GHz)
	<b>13400F</b>	6 / 12	2.5 – 4.6 GHz	4	1.8 – 3.3 GHz	20 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
Core™ i3	<b>13400T</b>	6 / 12	1.3 – 4.4 GHz	4	1.0 – 3.0 GHz	20 MB	35 W	DDR4-3200	UHD 730 (1.55 GHz)
	<b>13100</b>	4 / 8	3.4 – 4.5 GHz	–	–	12 MB	60 W	DDR4-3200	UHD 730 (1.50 GHz)
	<b>13100F</b>	4 / 8	3.4 – 4.5 GHz	–	–	12 MB	<b>58 W</b>	DDR4-3200	<b>None</b>
	<b>13100T</b>	4 / 8	2.5 – 4.2 GHz	–	–	12 MB	35 W	DDR4-3200	UHD 730 (1.50 GHz)

**K** = unlocked, **T** = Power optimized lifestyle, **F** = without integrated graphics, Base TDP = Base Thermal Design Power (max. Base Power Consumption).

Note: The Shuttle XPC slim Barebone XH610 does not support the Unlock-function of Intel K-Series processors.

P-Cores: Performance-Cores, E-Cores: Efficient-Cores

Core Clock: the listed core frequency ranges from Base Frequency to Turbo Frequency (Turbo Boost 3.0 Frequency is not mentioned here)

Base TDF: Processor Base Power dissipation that the processor is validated to not exceed at Base Frequency (Max. Turbo Power is not mentioned here)

Please refer to the support list for detailed processor support information at [global.shuttle.com](https://global.shuttle.com).

14<sup>TH</sup> GENERATION INTEL CORE DESKTOP PROCESSOR FAMILY

Socket LGA1700, Intel 7 / 10 nm, "Raptor Lake S Refresh" processor overview (Date: January 2024)

Processors with a **TDP of more than 65W** and **processors without graphics function (ID ends with "F")** are not supported (marked in red).**Important note:** for Intel Core processors of the generation 13 ("Raptor Lake-S") and generation 14 ("Raptor Lake-S Refresh") a BIOS up-date might be necessary, that need to be performed with a compatible processor.

- Generation 13 is supported since BIOS version 203 (available since March'23 and

- Generation 14 is supported since BIOS version 206 (available since Jan'24).

Download-Website: <https://global.shuttle.com/support/download>.

PROCESSOR	MODEL	P-CORES/ THREADS	P-CORES CLOCK/Turbo	E-CORES	E-CORES CLOCK/Turbo	SMART CACHE	BASE TDP	MEMORY SUPPORT	GRAPHICS ENGINE (MAX. CLOCK)
Core™ i9	<b>14900K</b>	8 / 16	3.2 – 5.6 GHz	16	2.4 – 4.4 GHz	36 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.65 GHz)
	<b>14900KF</b>	8 / 16	3.2 – 5.6 GHz	16	2.4 – 4.4 GHz	36 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>14900</b>	8 / 16	2.0 – 5.4 GHz	16	1.5 – 4.3 GHz	36 MB	65 W	DDR4-3200	UHD 770 (1.65 GHz)
	<b>14900F</b>	8 / 16	2.0 – 5.4 GHz	16	1.5 – 4.3 GHz	36 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>14900T</b>	8 / 16	1.1 – 5.1 GHz	16	0.8 – 4.0 GHz	36 MB	35 W	DDR4-3200	UHD 770 (1.65 GHz)
Core™ i7	<b>14700K</b>	8 / 16	3.4 – 5.6 GHz	8	2.5 – 4.3 GHz	33 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.60 GHz)
	<b>14700KF</b>	8 / 16	3.4 – 5.6 GHz	8	2.5 – 4.3 GHz	33 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>14700</b>	8 / 16	2.1 – 5.3 GHz	8	1.5 – 4.2 GHz	33 MB	65 W	DDR4-3200	UHD 770 (1.60 GHz)
	<b>14700F</b>	8 / 16	2.1 – 5.4 GHz	8	1.5 – 4.2 GHz	33 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>14700T</b>	8 / 16	1.3 – 5.0 GHz	8	0.9 – 3.7 GHz	33 MB	35 W	DDR4-3200	UHD 770 (1.60 GHz)
Core™ i5	<b>14600K</b>	6 / 12	3.5 – 5.3 GHz	8	2.6 – 4.0 GHz	24 MB	<b>125 W</b>	DDR4-3200	UHD 770 (1.50 GHz)
	<b>14600KF</b>	6 / 12	3.5 – 5.3 GHz	8	2.6 – 4.0 GHz	24 MB	<b>125 W</b>	DDR4-3200	<b>None</b>
	<b>14600</b>	6 / 12	2.7 – 5.2 GHz	8	2.0 – 3.9 GHz	24 MB	65 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>14600T</b>	6 / 12	1.8 – 5.1 GHz	8	1.3 – 3.6 GHz	24 MB	35 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>14500</b>	6 / 12	2.6 – 5.0 GHz	8	1.9 – 3.7 GHz	24 MB	65 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>14500T</b>	6 / 12	1.7 – 4.8 GHz	8	1.2 – 3.4 GHz	24 MB	35 W	DDR4-3200	UHD 770 (1.55 GHz)
	<b>14400</b>	6 / 12	2.5 – 4.7 GHz	4	1.8 – 3.5 GHz	20 MB	65 W	DDR4-3200	UHD 730 (1.55 GHz)
	<b>14400F</b>	6 / 12	2.5 – 4.7 GHz	4	1.8 – 3.5 GHz	20 MB	<b>65 W</b>	DDR4-3200	<b>None</b>
	<b>14400T</b>	6 / 12	1.5 – 4.5 GHz	4	1.1 – 3.2 GHz	20 MB	35 W	DDR4-3200	UHD 730 (1.55 GHz)
Core™ i3	<b>14100</b>	4 / 8	3.5 – 4.7 GHz	–	–	12 MB	60 W	DDR4-3200	UHD 730 (1.50 GHz)
	<b>14100F</b>	4 / 8	3.5 – 4.7 GHz	–	–	12 MB	<b>58 W</b>	DDR4-3200	<b>None</b>
	<b>14100T</b>	4 / 8	2.7 – 4.4 GHz	–	–	12 MB	35 W	DDR4-3200	UHD 730 (1.50 GHz)

**K** = unlocked, **T** = Power optimized lifestyle, **F** = without integrated graphics, **Base TDP** = Base Thermal Design Power (max. Base Power Consumption).Note: The Shuttle XPC slim Barebone XH610 does not support the Unlock-function of Intel K-Series processors.

P-Cores: Performance-Cores, E-Cores: Efficient-Cores

Core Clock: the listed core frequency ranges from Base Frequency to Turbo Frequency (Turbo Boost 3.0 Frequency is not mentioned here)

Base TDF: Processor Base Power dissipation that the processor is validated to not exceed at Base Frequency (Max. Turbo Power is not mentioned here)

Please refer to the support list for detailed processor support information at [global.shuttle.com](https://global.shuttle.com).