


MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION
①	CABLE	UTP (24AWG*1PR)*4+LSOH OD:5.8±0.2mm COLOR:Assorted upon request
②	RJ45 CONNECTOR	RJ45,8P8C,TWO FORK 3u" GOLD PLATED CONTACTS SHORT TYPE TWO PARTING
③	MOLDING PVC	MOLDING PVC 45P COLOR:Assorted upon request

PIN OUT

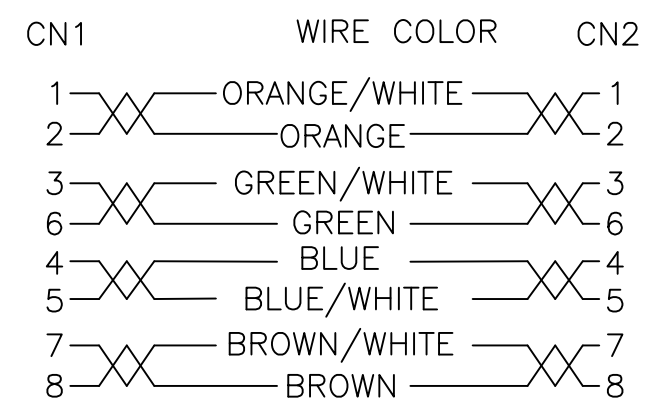

Marking: UTP CAT6A PATCH CABLE LSOH ISO/IEC 11801 Ed.2 EN 50288 ANSI/TIA-568-C.2 IEC 60332-1

Working temperature : -20° - + 75°

ITEM NO	LENGTH
	500±30mm
	1000±30mm
	2000±50mm
	3000±50mm
	5000±75mm
	7500±100mm
	10000±100mm
	15000±120mm
	20000±130mm
	25000±130mm
	30000±150mm



ELECTRONIC TEST:
A.OPEN/SHORT/INTERMITTENCE: 100%.

REMARK NO	CHA.NO	SIGNATURE	DATE	SIGN	W.T	SCALE	UTP CAT6A 24AWG
DRAWN BY	Renzhi						
CHECKED BY							
AUDITED BY		APPROVED BY					
CRAFT		DATE	2012.11.29	PAGE OF			ITEM NO. (SECTION SHEET)